
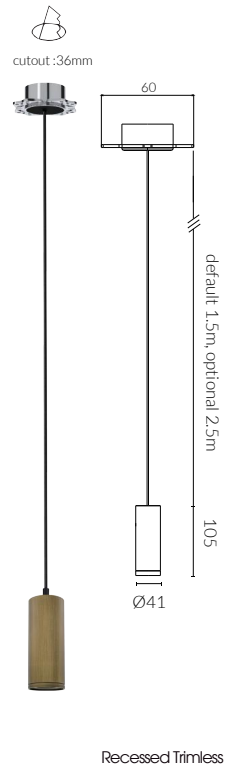
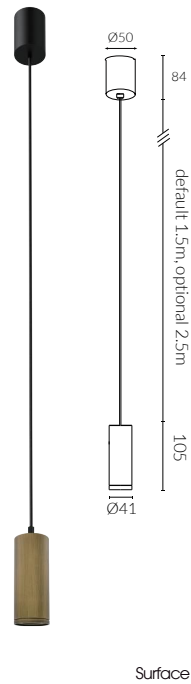



BELLA

Φ41 Zoomable 20°-50° Pendant

-  White Painted
-  Black Painted
-  Antique Bronze
-  Brushed Grey

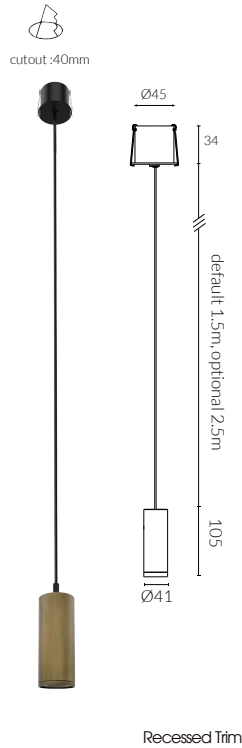


IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K/2700-6000K
Typical Source	
Efficacy (lm/W):	96
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 12V 600mA 8W
Ambient temp:	-20 °C to 45 °C
Class:	II
Material:	Fine aluminium 6063A




8W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2978	0.21
1.0	745	0.42
1.5	331	0.63
2.0	186	0.84
2.5	119	1.04
3.0	83	1.25





8W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	1805	0.30
1.0	451	0.59
1.5	201	0.89
2.0	113	1.18
2.5	72	1.48
3.0	50	1.78




8W Ra92 3000K 50°


h(m)	E(lx)	D(m)
0.5	795	0.49
1.0	199	0.97
1.5	88	1.46
2.0	50	1.94
2.5	32	2.43
3.0	22	2.91

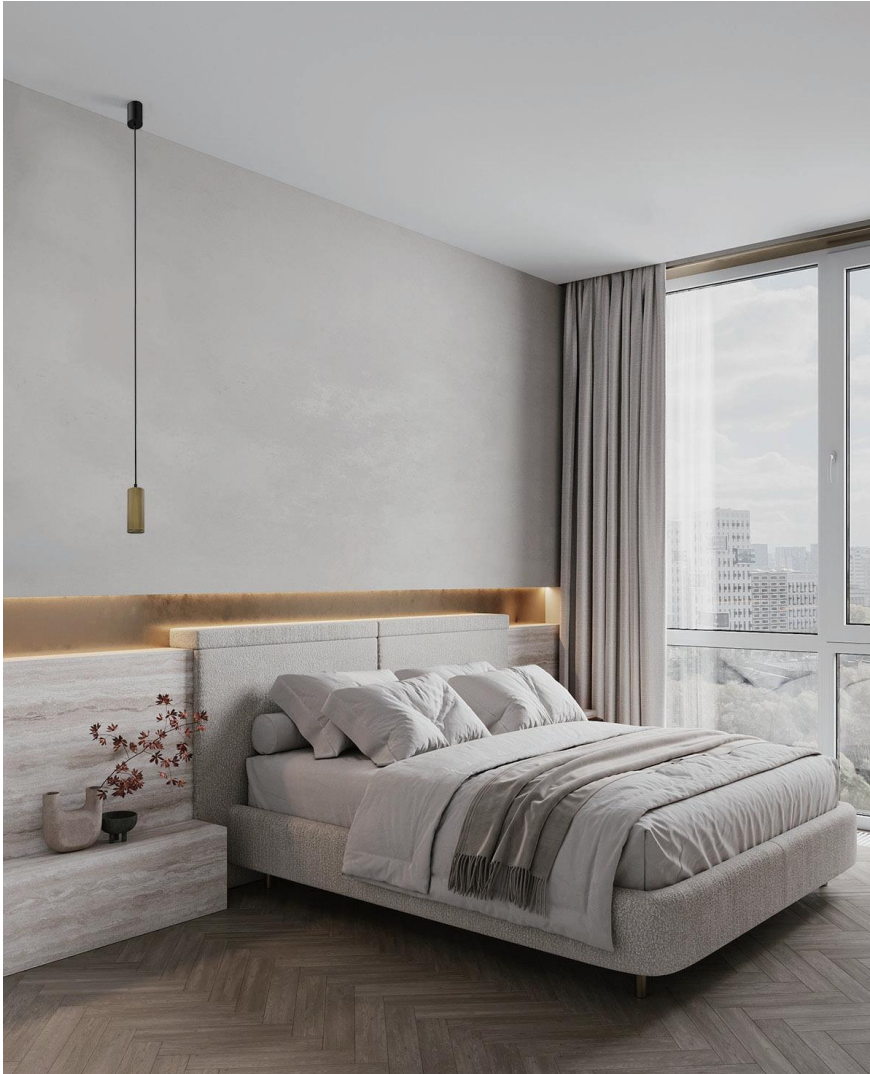

W system	lm system	optics	code
8W	388-385	20°- 50°	RTP4108W-30N2050-B



W system	lm system	optics	code
8W	388-385	20°- 50°	TLP4108W-30N2050-B



W system	lm system	optics	code
8W	388-385	20°- 50°	STP4108W-30N2050-B