



ACME

Φ53

Outdoor Wall Light




Fixed Optic




Black Painted

- IP Rating:** IP65
- Optics:** 15°/24°/36°
- UGR:** <10
- CRI:** 98Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K
- Typical Source**
- Efficacy (lm/W):** 110
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 36V 200mA 8Wx2
- Ambient temp:** -20 °C to 45 °C
- Class:** II
- Optional accessories:** Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter
- Material:** Fine aluminium 6063A




8W Ra98 3000K 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 9800 | 0.15 |
| 1.0 | 2450 | 0.30 |
| 1.5 | 1089 | 0.45 |
| 2.0 | 613 | 0.60 |
| 2.5 | 392 | 0.76 |
| 3.0 | 272 | 0.91 |





8W Ra98 3000K 24°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 4501 | 0.20 |
| 1.0 | 1125 | 0.40 |
| 1.5 | 500 | 0.60 |
| 2.0 | 281 | 0.80 |
| 2.5 | 180 | 1.00 |
| 3.0 | 125 | 1.20 |



8W Ra98 3000K 36°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 2744 | 0.27 |
| 1.0 | 686 | 0.55 |
| 1.5 | 305 | 0.82 |
| 2.0 | 172 | 1.09 |
| 2.5 | 110 | 1.37 |
| 3.0 | 76 | 1.64 |

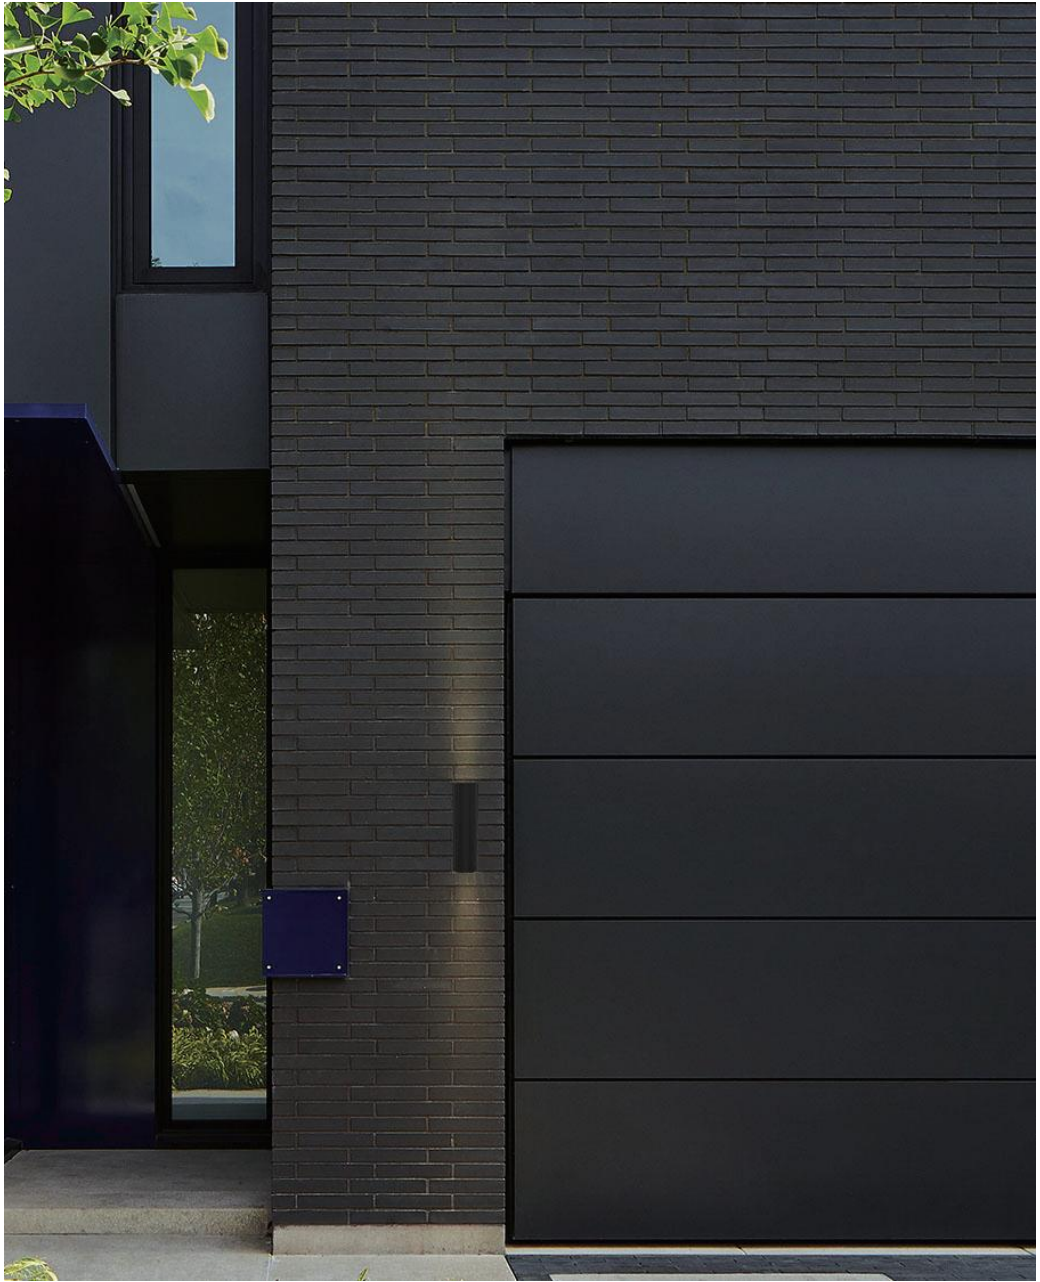

| W system | lm system | optics | code |
|-----------------|------------------|---------------|------------------|
| 8Wx2 | 419x2 | 15° | OWE5708W-30N15-B |
| 8Wx2 | 470x2 | 24° | OWE5708W-30N24-B |
| 8Wx2 | 456x2 | 36° | OWE5708W-30N36-B |