



# GLAMO

## Φ68 Zoomable 15°-50° Spotlight

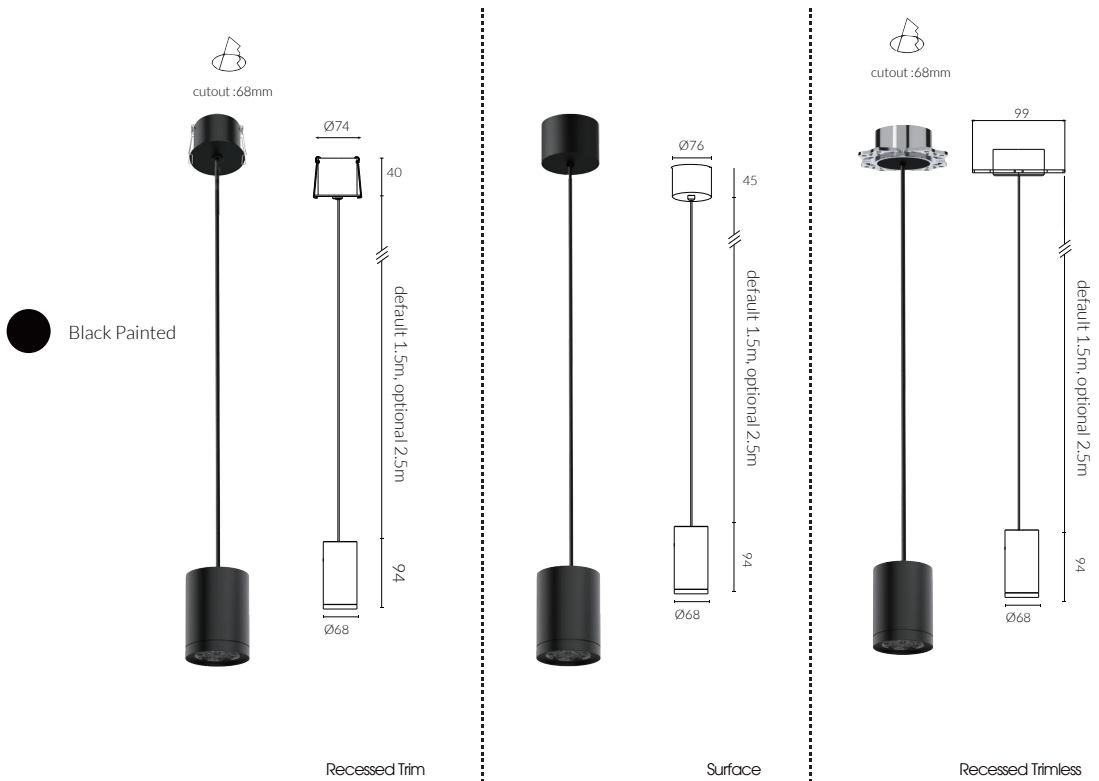


<b>IP Rating:</b>	IP20
<b>Optics:</b>	Zoomable 15°-50°
<b>UGR:</b>	<17
<b>CRI:</b>	98Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K

<b>Typical Source</b>	110
<b>Efficacy (lm/W):</b>	110
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning:</b>	2 Step MacAdams
<b>Input:</b>	AC220-240V 50/60Hz
<b>Output:</b>	DC 36V 300mA 12W
<b>Ambient temp:</b>	-20 C to 45 C
<b>Class:</b>	II
<b>Material:</b>	Fine aluminium 6063A



12W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	12099	0.14
1.0	3025	0.27
1.5	1344	0.41
2.0	756	0.54
2.5	484	0.68
3.0	336	0.81



12W Ra98 3000K 40°


h(m)	E(lx)	D(m)
0.5	2174	0.38
1.0	544	0.76
1.5	242	1.14
2.0	136	1.52
2.5	87	1.90
3.0	60	2.28



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
12W	756-747	15°- 50°	RTP6812W-30N1550-B



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
12W	756-747	15°- 50°	TLP6812W-30N1550-B



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
12W	756-747	15°- 50°	STP6812W-30N1550-B