

EVOLINE



reddot winner 2023
lighting design





27X25 Recessed 1 Spot Fixed Line





cutout:27X25mm




Fixed Optic



bezel | baffle


-  matt white painted
-  matt black painted

| | |
|---------------------------|---------------------------------------------------|
| IP Rating: | IP20 and IP44 options |
| Optics: | 14°/25°/35° |
| UGR: | < 10 |
| CRI: | 92Ra |
| Lifetime: | >50,000 hrs (L70 B10) |
| CCT: | 3000K/3500K |
| Typical Source | |
| Efficacy (lm/W): | 113 |
| Control: | On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi |
| Binning | 2 Step MacAdams |
| Input: | AC220-240V 50/60Hz |
| Output: | DC 3V 650mA 3W |
| Ambient temp: | -20 °C to 45 °C |
| Class: | II |
| Ceiling Thickness: | 5mm-28mm |
| Material: | Fine aluminium 6063A |




3W Ra92 3000K 14°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 2760 | 0.13 |
| 1.0 | 690 | 0.26 |
| 1.5 | 307 | 0.38 |
| 2.0 | 172 | 0.51 |
| 2.5 | 110 | 0.64 |
| 3.0 | 77 | 0.77 |




3W Ra92 3000K 25°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 923 | 0.22 |
| 1.0 | 231 | 0.44 |
| 1.5 | 103 | 0.67 |
| 2.0 | 58 | 0.89 |
| 2.5 | 37 | 1.10 |
| 3.0 | 26 | 1.30 |



3W Ra92 3000K 35°


| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 834 | 0.34 |
| 1.0 | 209 | 0.68 |
| 1.5 | 93 | 1.00 |
| 2.0 | 52 | 1.40 |
| 2.5 | 33 | 1.70 |
| 3.0 | 23 | 2.10 |




| W system | lm system | optics | code |
|-----------------|------------------|---------------|------------------|
| 3W | 138 | 14° | EFL0103W-30N14-B |
| 3W | 120 | 25° | EFL0103W-30N25-B |
| 3W | 146 | 35° | EFL0103W-30N35-B |

EVOLINE

MUSE
DESIGN
AWARDS
2023
GOLD
WINNER

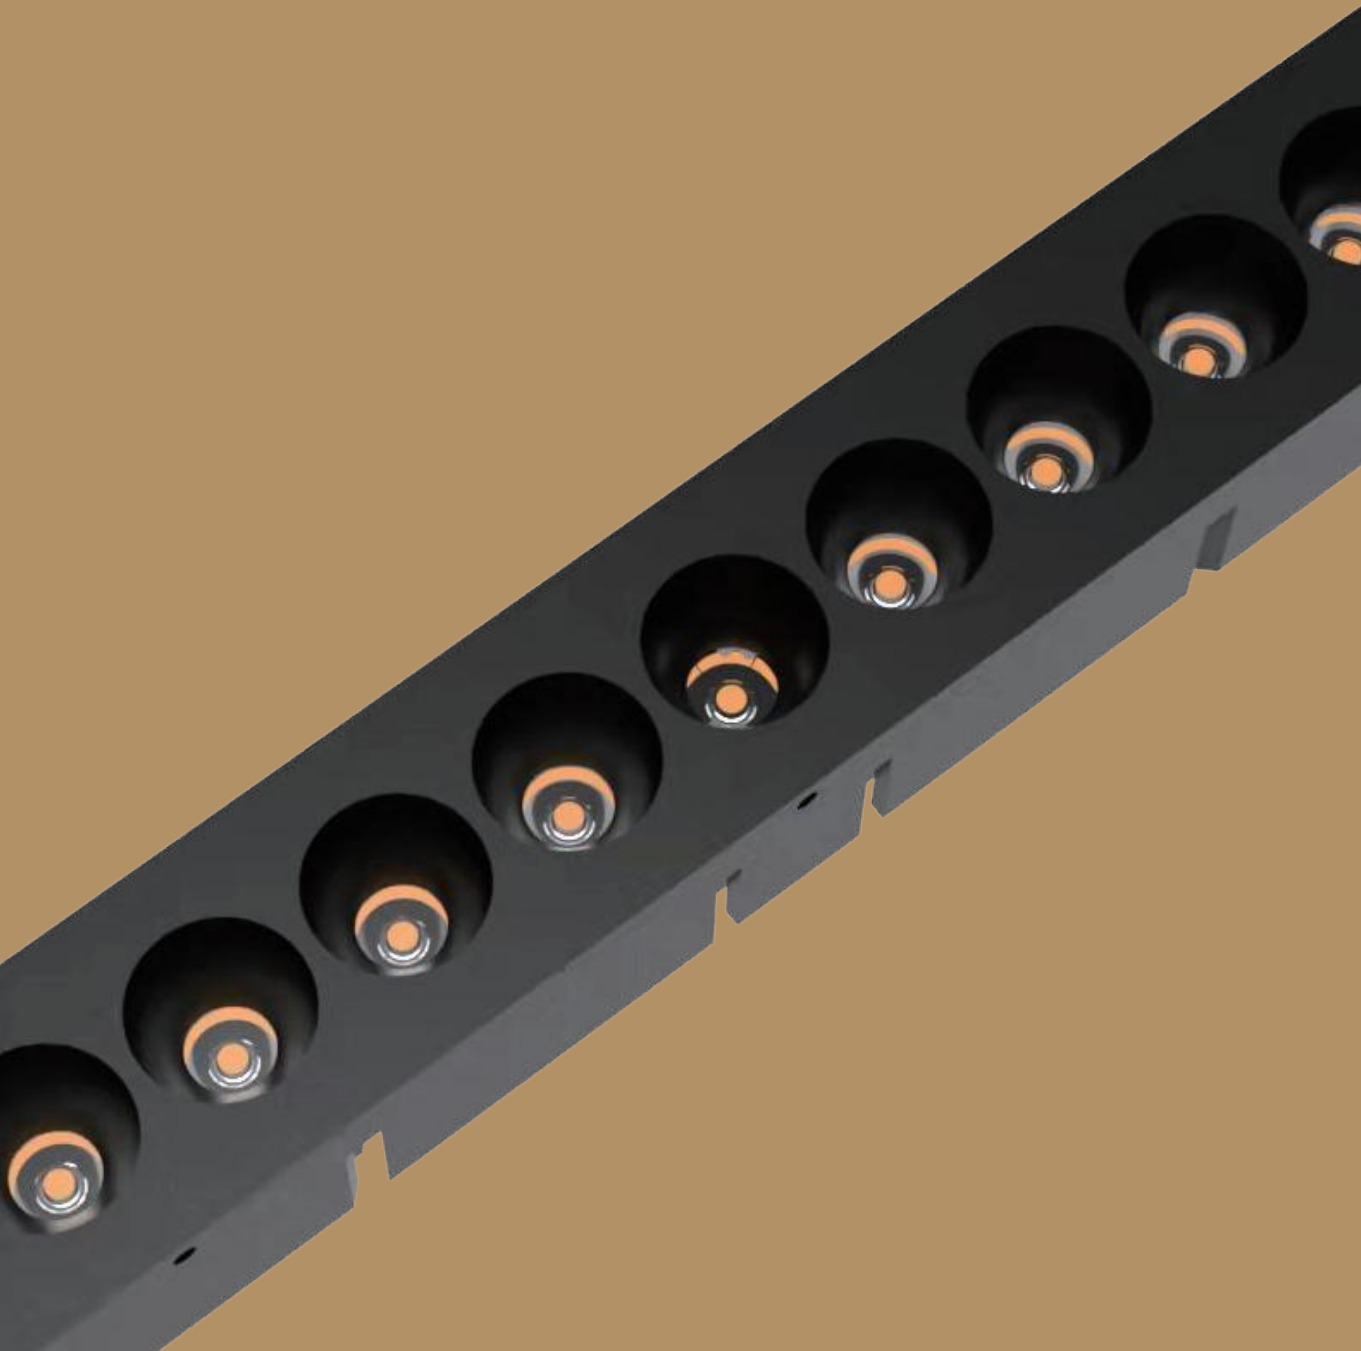

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

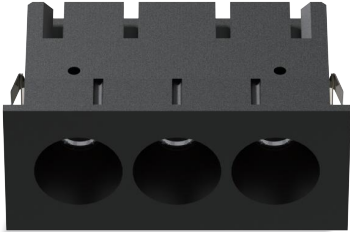

red dot winner 2023
lighting design

