

EVOLINE



reddot winner 2023
lighting design



MUSE
DESIGN
AWARDS



130X25 Recessed 6 Spots Fixed Line





cutout:130X25mm

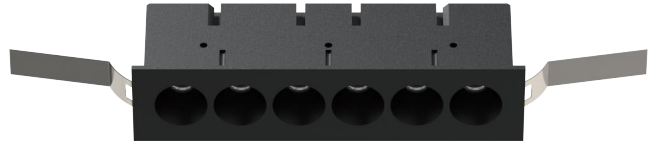


Fixed Optic



bezel | baffle


-  matt white painted
-  matt black painted

- IP Rating:** IP20 and IP44 options
- Optics:** 14°/25°/35°
- UGR:** < 10
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K/3500K/2700K-6000K
- Typical Source Efficacy (lm/W):** 113
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 18V 400mA 8W
DC 18V 500mA 10W
DC 18V 600mA 12W
- Ambient temp:** -20 °C to 45 °C
- Class:** II
- Ceiling Thickness:** 5mm-28mm
- Material:** Fine aluminium 6063A




12W Ra92 3000K 14°

h(m)	E(lx)	D(m)
0.5	15873	0.13
1.0	3968	0.26
1.5	1764	0.39
2.0	992	0.52
2.5	635	0.65
3.0	441	0.78



12W Ra92 3000K 25°

h(m)	E(lx)	D(m)
0.5	5481	0.23
1.0	1370	0.45
1.5	609	0.68
2.0	343	0.91
2.5	219	1.14
3.0	152	1.36




12W Ra92 3000K 35°


h(m)	E(lx)	D(m)
0.5	4125	0.34
1.0	1031	0.68
1.5	458	1.02
2.0	258	1.35
2.5	165	1.69
3.0	115	2.03




DuraGreen project:
DuraGreen Showroom



W system	lm system	optics	code
8W	553	14°	EFL0608W-30N14-B
8W	563	25°	EFL0608W-30N25-B
8W	605	35°	EFL0608W-30N35-B




W system	lm system	optics	code
10W	648	14°	EFL0610W-30N14-B
10W	615	25°	EFL0610W-30N25-B
10W	660	35°	EFL0610W-30N35-B




W system	lm system	optics	code
12W	772	14°	EFL0612W-30N14-B
12W	680	25°	EFL0612W-30N25-B
12W	790	35°	EFL0612W-30N35-B

EVOLINE

MUSE
DESIGN
AWARDS
2023
GOLD
WINNER

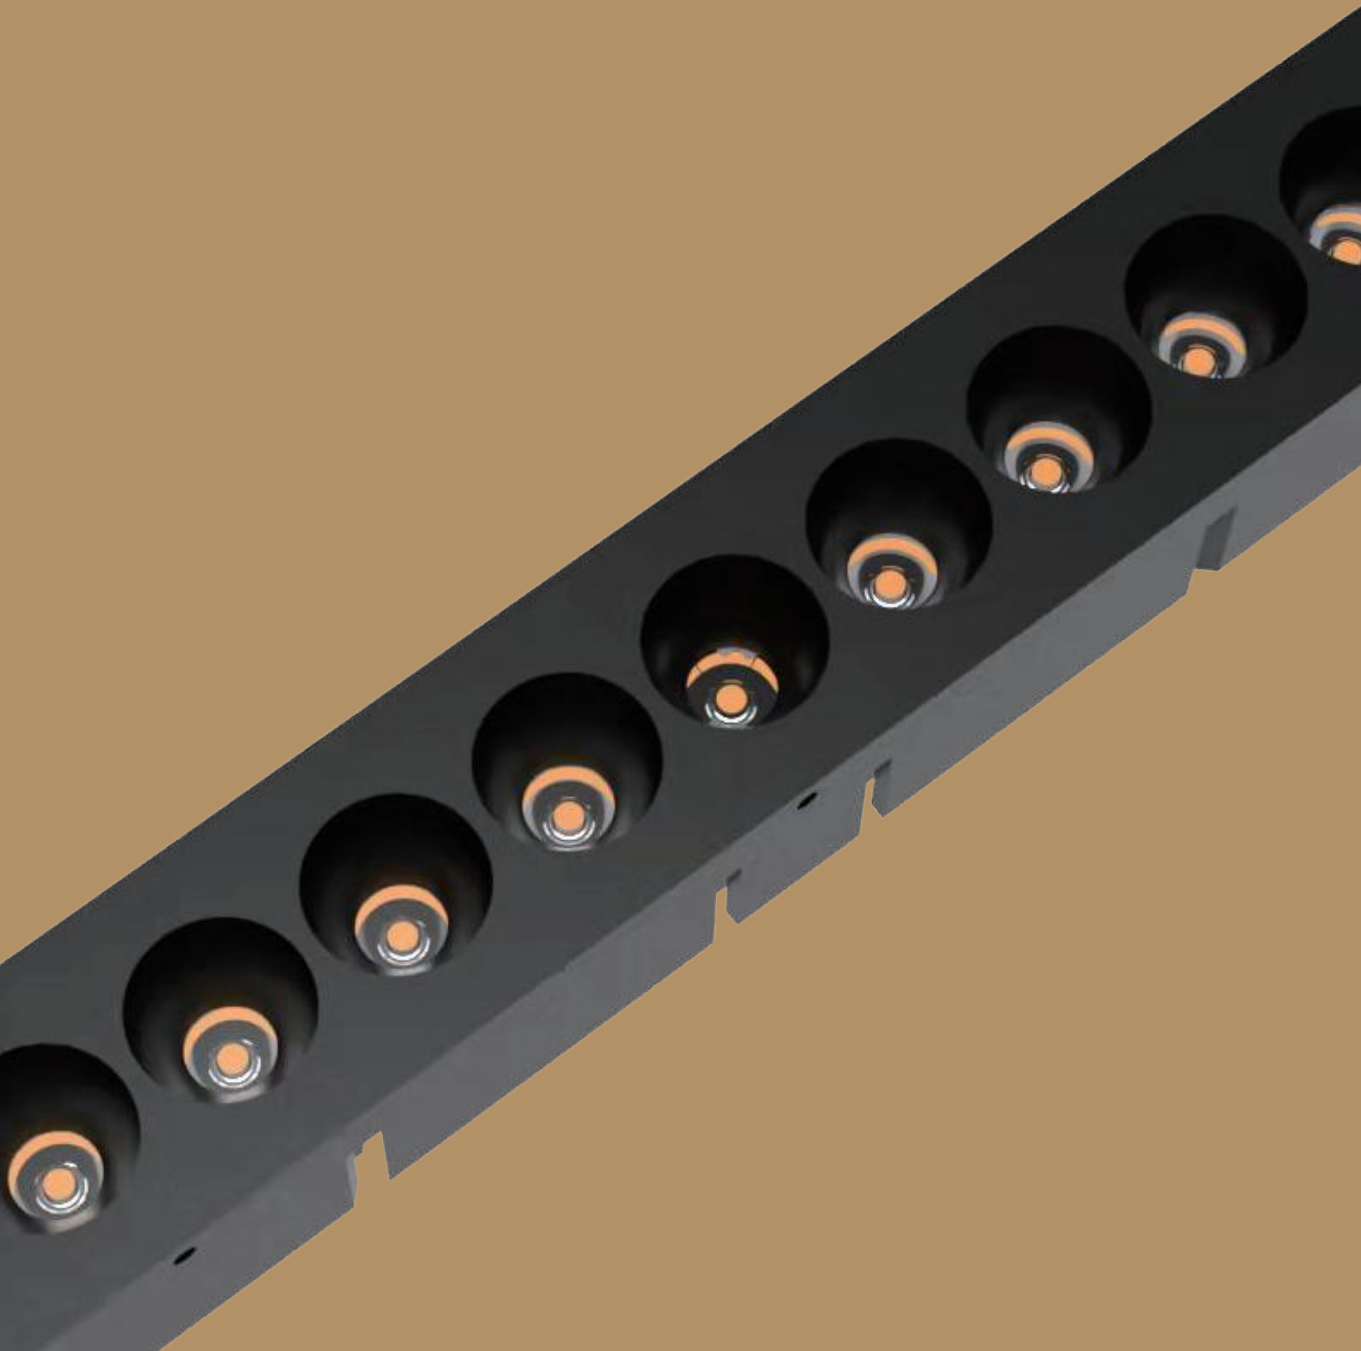

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

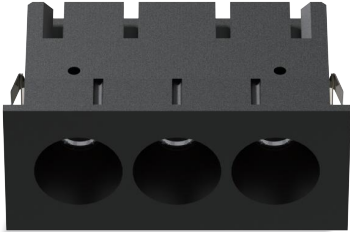

red dot winner 2023
lighting design

