


# EVOLINE

## L1124 Surface Pendant




Fixed

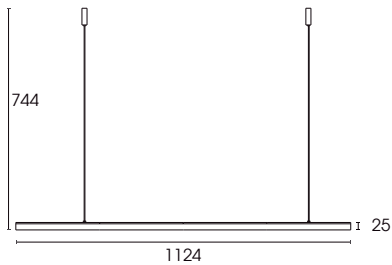


White Painted




Black Painted

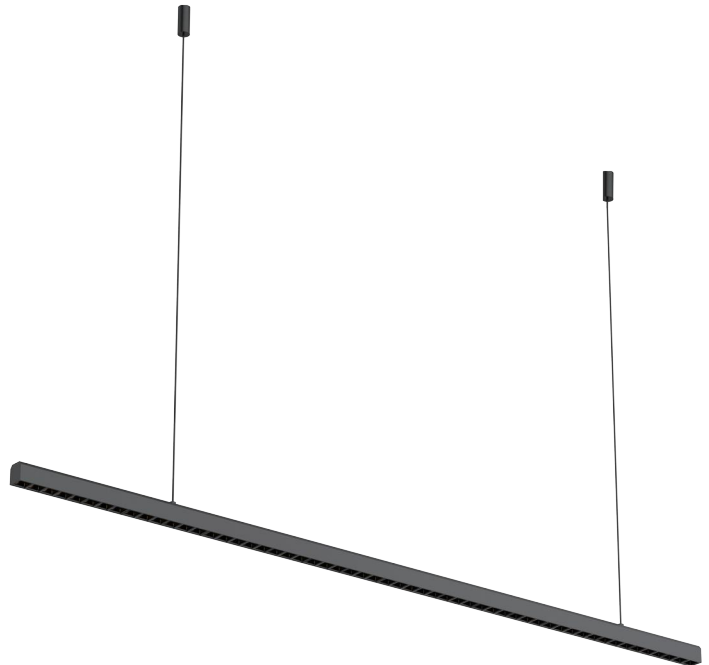


<b>IP Rating:</b>	IP20
<b>Optics:</b>	30°/55°/65°/65°Extra Wide/Forward throwing
<b>UGR:</b>	<17
<b>CRI:</b>	92Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	3000K/4000K
<b>Typical Source</b>	
<b>Efficacy (lm/W):</b>	113
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning</b>	2 Step MacAdams
<b>Voltage:</b>	DC 24V
<b>Power(W):</b>	21W
<b>Ambient temp:</b>	-20 C to 45 C
<b>Material:</b>	Fine aluminium 6063A
<b>Class:</b>	II




30°




55°




65°



65° Extra Wide



Forward throwing



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
21W	1624	30°	STPL5421W-30N30
21W	1533	55°	STPL5421W-30N55
21W	1624	65°	STPL5421W-30N65
21W	1533	65°Extra Wide°	STPL5421W-30N65E
21W	1456	Forward throwing	STPL5421W-30NFT