


ORBIT 48V


Φ45 Adjustable 48V Contour Spotlight

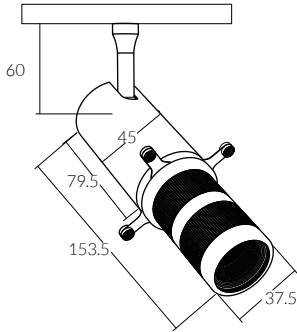

Black Painted


IP Rating: IP20
Optics: Framing
UGR: <10
CRI: 98Ra
Lifetime: >50,000 hrs (L70 B10)
CCT: 2700K/3000K/3500K/4000K/5000K/
2000K-3000K/1800K-4000K/2700K-6000K

Typical Source
Efficacy (lm/W): 110
Control: On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning 2 Step MacAdams
Input: 48 VDC
Output: DC 36V 250mA 10W
Ambient temp: -20 C to 45 C
Class: III



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25

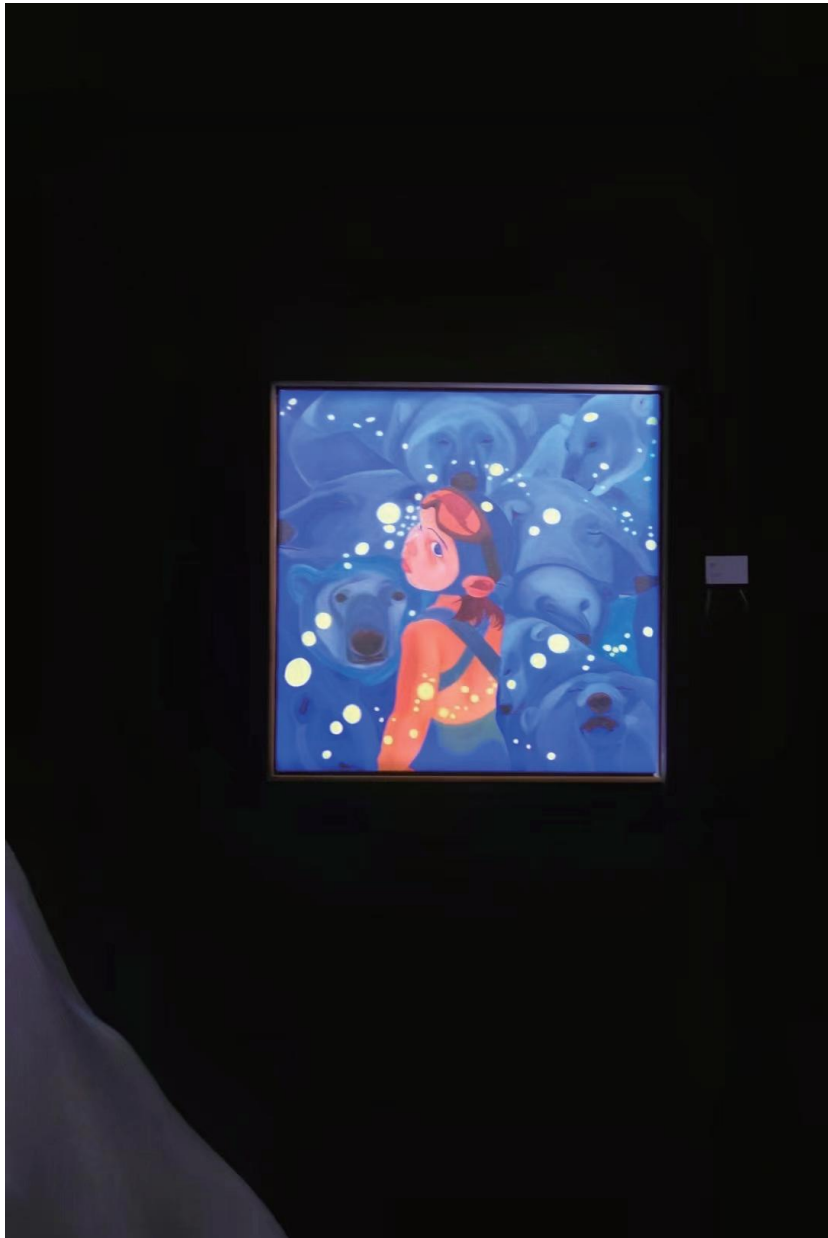

W system

lm system

code

10W

239

M22C4510W