


EVOLINE 48V

48V Light Stripe Fixed Version

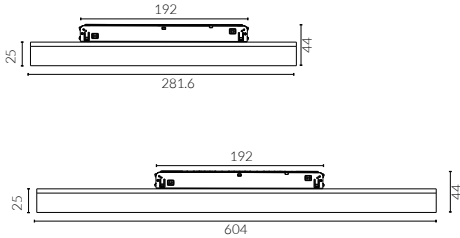

Black Painted

IP Rating:	IP20
Optics:	120°
UGR:	< 19
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K/2700K-6000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 300mA 12W DC 36V 450mA 18W
Ambient temp:	-20 °C to 45 °C
Class:	III



W system	lm system	length	optics	code
12W	548	304	120°	M22DF12W-30N120-B
18W	822	604	120°	M22DF18W-30N120-B