



EVOLINE 48V


1124mm
48V Pendant

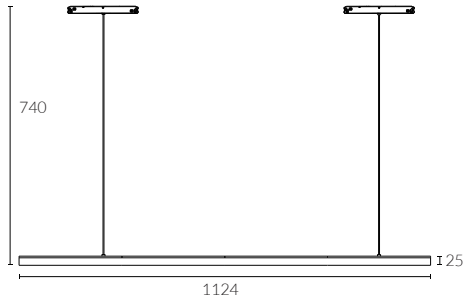


● Black Painted

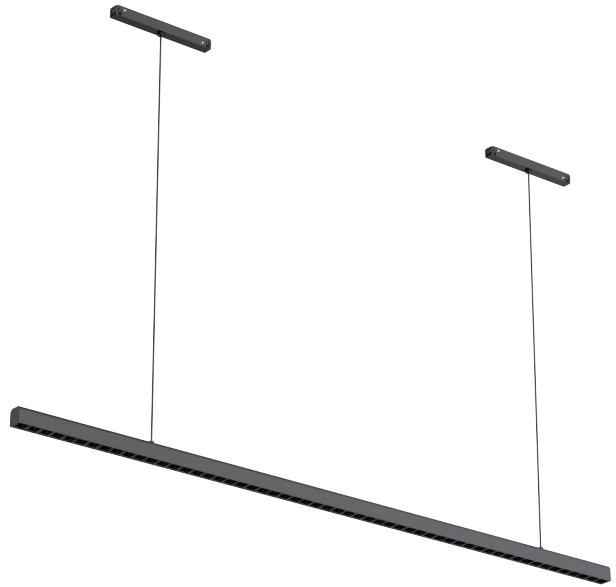


IP Rating: IP20
Optics: 30°/55°/65°/65°Extra Wide/Forward throwing
UGR: <19
CRI: 92Ra
Lifetime: >50,000 hrs (L70 B10)
CCT: 3000K
Typical Source Efficacy (lm/W): 113
Control: On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning 2 Step MacAdams
Voltage connection 48 VDC 21W
Luminous efficacy 1624 lm - 3000K
Ambient temp: -20 °C to 45 °C
Class: III




30°




55°




65°



65° Extra Wide



Forward throwing



W system	Im system	optics	code
21W	1624	30°	M22P112421W-30N30-B
21W	1533	55°	M22P112421W-30N55-B
21W	1624	65°	M22P112421W-30N65-B
21W	1533	65°Extra Wide	M22P112421W-30N65E-B
21W	1456	Forward throwing	M22P112421W-30NFT-B