


# ORBIT

## Φ45 Surface Contour Spotlight




Adjustable Optic

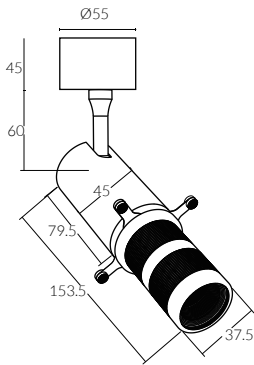

 Black Painted

<b>IP Rating:</b>	IP20
<b>Optics:</b>	Framing
<b>UGR:</b>	<10
<b>CRI:</b>	98Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	2700K/3000K
<b>Typical Source</b>	
<b>Efficacy (lm/W):</b>	110
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning:</b>	2 Step MacAdams
<b>Input:</b>	AC220-240V 50/60Hz
<b>Output:</b>	DC 36V 250mA 10W
<b>Ambient temp:</b>	-20 C to 45 C
<b>Class:</b>	II



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25



**W system**

**lm system**

**code**

---

10W

239

MASC4510W