


GLAMO 48V

Φ68

Adjustable 48V Contour Spotlight



Adjustable Optic

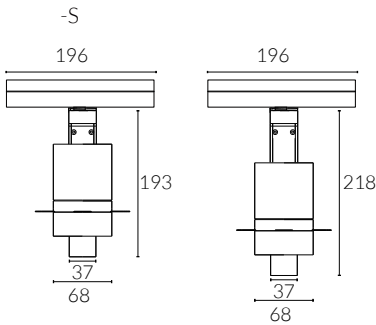


minimal track

standard track




Black Painted

IP Rating:	IP20
Optics:	Framing
UGR:	<10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/2000K-3000K/1800K-4000K/2700K-6000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 45 °C
Class:	III
Material:	structure fine aluminum 6063A



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25

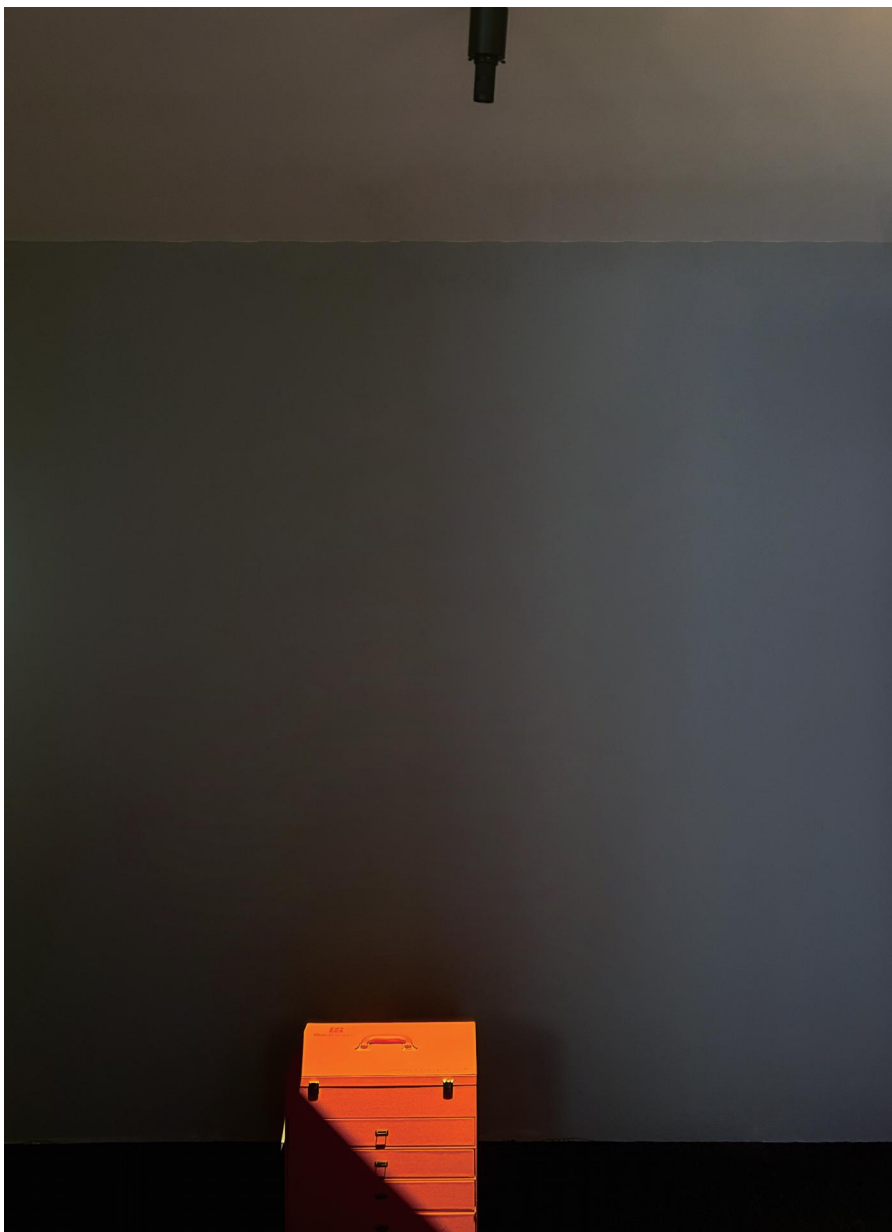

W system	lm system	code
10W	239	MC6810W