



BELLA 48V

Φ41 Zoomable 20°-50° 48V Pendant

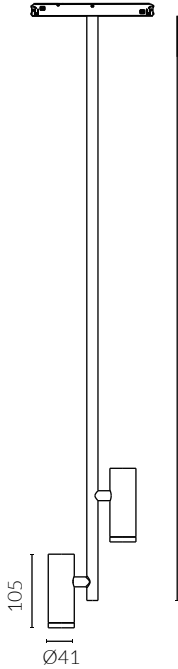


877 pole length bespokable

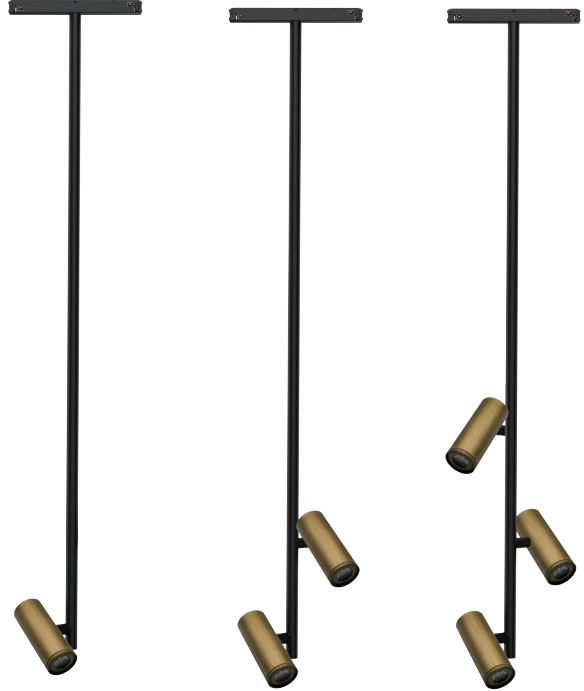


 Antique Bronze

IP Rating:	IP20
Optics:	Zoomable 20°-50°
UGR:	<17
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K/2700-6000K
Typical Source Efficacy (lm/W):	96
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48VDC
Output:	DC 12V 600mA 8W
Ambient temp:	-20 C to 45 C
Class:	III
Material:	structure fine aluminum 6063A




8W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2978	0.21
1.0	745	0.42
1.5	331	0.63
2.0	186	0.84
2.5	119	1.04
3.0	83	1.25




8W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	1805	0.30
1.0	451	0.59
1.5	201	0.89
2.0	113	1.18
2.5	72	1.48
3.0	50	1.78




8W Ra92 3000K 50°


h(m)	E(lx)	D(m)
0.5	795	0.49
1.0	199	0.97
1.5	88	1.46
2.0	50	1.94
2.5	32	2.43
3.0	22	2.91



W system	Spots	lm system	optics	code
8W	1 Spot	388- 385	20°- 50°	MP14108WX1-30N2050-AB



W system	Spots	lm system	optics	code
8W*2	2 Spot	388*2-385*2	20°- 50°	MP24108WX2-30N2050-AB



W system	Spots	lm system	optics	code
8W*3	3 Spot	388*3-385*3	20°- 50°	MP34108WX3-30N2050-AB