




EVOLINE 48V

67X64 48V Pendant

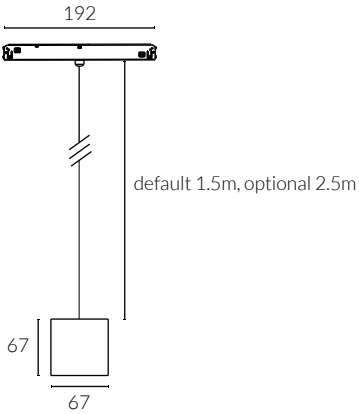


Bezel

 matt white painted


 matt black painted

IP Rating: IP20
Optics: 50°
UGR: <17
CRI: 92Ra
Lifetime: >50,000 hrs (L70 B10)
CCT: 3000K/3500K
Typical Source
Efficacy (lm/W): 113
Control: On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning 2 Step MacAdams
Input: 48 VDC
Output: DC 27V 300mA 8W
Ambient temp: -20 °C to 45 °C
Class: III
Material: structure fine aluminum 6063A



8W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	907	0.48
1.0	227	0.96
1.5	101	1.44
2.0	57	1.93
2.5	36	2.41
3.0	25	2.89

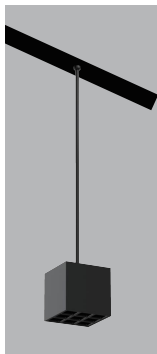

W system	lm system	optics	code
8W	458	50°	MPQ0908W-30N50