






BELLA 48V

Φ41 Zoomable 20°-50° 48V Pendant

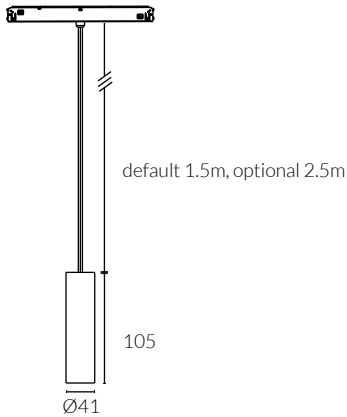


Ceiling hook to move light point

-  White Painted
-  Black Painted
-  Antique Bronze
-  Brushed Grey




- IP Rating:** IP20
- Optics:** Zoomable 20°-50°
- UGR:** <17
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K/3500K/2700-6000K
- Typical Source Efficacy (lm/W):** 96
- Control:** On/off, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** 48 VDC
- Output:** 12V 600mA 8W
- Ambient temp:** -20 °C to 45 °C
- Class:** III
- Material:** structure fine aluminum 6063A




8W Ra92 3000K 20°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 2978 | 0.21 |
| 1.0 | 745 | 0.42 |
| 1.5 | 331 | 0.63 |
| 2.0 | 186 | 0.84 |
| 2.5 | 119 | 1.04 |
| 3.0 | 83 | 1.25 |




8W Ra92 3000K 30°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 1805 | 0.30 |
| 1.0 | 451 | 0.59 |
| 1.5 | 201 | 0.89 |
| 2.0 | 113 | 1.18 |
| 2.5 | 72 | 1.48 |
| 3.0 | 50 | 1.78 |



8W Ra92 3000K 50°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 795 | 0.49 |
| 1.0 | 199 | 0.97 |
| 1.5 | 88 | 1.46 |
| 2.0 | 50 | 1.94 |
| 2.5 | 32 | 2.43 |
| 3.0 | 22 | 2.91 |



| W system | lm system | optics | code |
|-----------------|------------------|---------------|---------------------|
| 8W | 388-385 | 20°- 50° | MPW4108W-30N2050-AB |