


EVOLINE


67X64 Square Pendant






Fixed Optic




Bezel

 matt white painted

 matt black painted

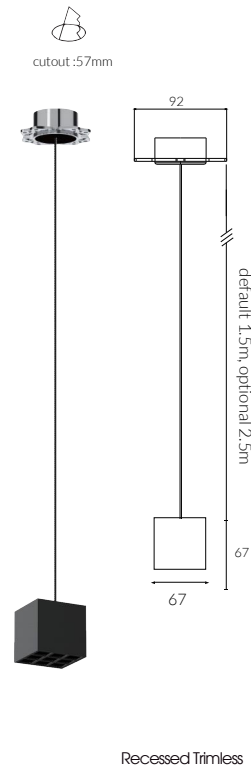
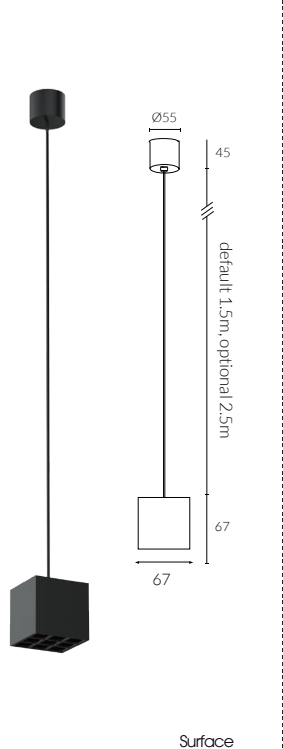
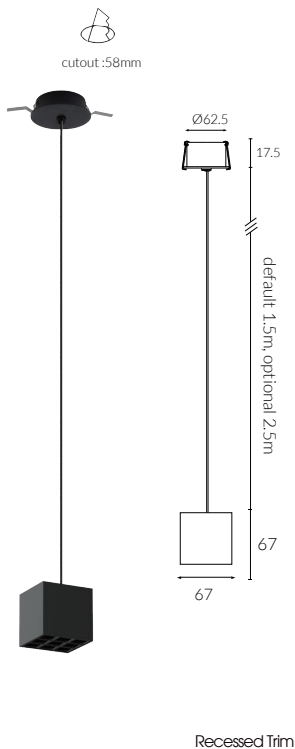


IP Rating:	IP20
Optics:	50°
UGR:	<17
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/3500K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 27V 300mA 8W
Ambient temp:	-20 °C to 45 °C
Class:	II
Material:	Fine aluminium 6063A



8W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	907	0.48
1.0	227	0.96
1.5	101	1.44
2.0	57	1.93
2.5	36	2.41
3.0	25	2.89



W system	lm system	optics	code
8W	458	50°	RTPQ0908W-30N50

W system	lm system	optics	code
8W	458	50°	TLPQ0908W-30N50

W system	lm system	optics	code
8W	458	50°	STPQ0908W-30N50