

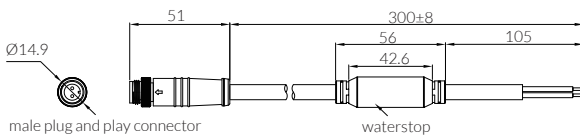


FOCUS

Outdoor Projector



Adjustable Optic

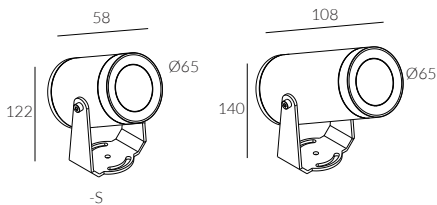

male plug and play connector

waterstop

- IP Rating:** IP66
- Optics:** 15°/24°/36°/50°
- UGR:** <19
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K
- Typical Source**
- Efficacy (lm/W):** 113
- Control:** On/off
- Binning** 2 Step MacAdams
- Voltage:** DC 24V
- Power(W):** 7W/10W/15W
- Ambient temp:** -20 C to 45 C
- Class:** III
- Plug Type:** Plug & Play (2 pin) - male

Accessories not included

Ground Stake




Code: ODG-1
Dimensions: Ø38mm*H160mm

Tree / pole bracket




Code: ODG-2
Dimensions: 1M/1.5M/2M




15W Ra92 3000K 15°

h(m)	E(lx)	D(m)
0.5	19856	0.12
1.0	4964	0.23
1.5	2206	0.35
2.0	1241	0.46
2.5	794	0.58
3.0	552	0.69




15W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	9636	0.20
1.0	2409	0.41
1.5	1071	0.61
2.0	602	0.81
2.5	385	1.02
3.0	268	1.22



15W Ra92 3000K 36°

h(m)	E(lx)	D(m)
0.5	5780	0.30
1.0	1445	0.60
1.5	642	0.89
2.0	361	1.19
2.5	231	1.49
3.0	161	1.79



15W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	2268	0.46
1.0	567	0.92
1.5	252	1.37
2.0	142	1.83
2.5	91	2.29
3.0	63	2.75



W system	lm system	optics	code
7W	549	15°	SF6507W-S-15
7W	627	24°	SF6507W-S-24
7W	603	36°	SF6507W-S-36
7W	592	50°	SF6507W-S-50



W system	lm system	optics	code
10W	749	15°	SF6510W-15
10W	849	24°	SF6510W-24
10W	834	36°	SF6510W-36
10W	811	50°	SF6510W-50



W system	lm system	optics	code
15W	984	15°	SF6515W-15
15W	1124	24°	SF6515W-24
15W	1086	36°	SF6515W-36
15W	1055	50°	SF6515W-50