



## Φ68 Recessed Contour Spotlight




Adjustable Optic



Black Painted

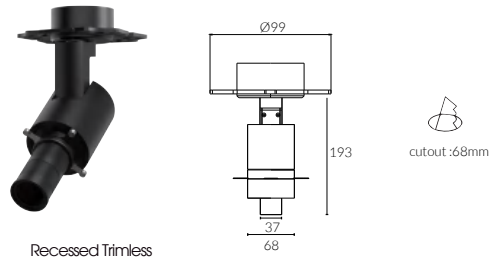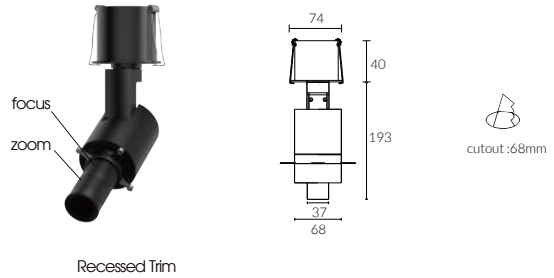

**IP Rating:** IP20  
**Optics:** Framing  
**UGR:** <10  
**CRI:** 92Ra  
**Lifetime:** >50,000 hrs (L70 B10)  
**CCT:** 2700K/3000K/3500K/4000K/5000K/  
 2000K-3000K/1800K-4000K/2700K-6000K



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25

**Typical Source Efficacy (lm/W):** 113  
**Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi  
**Binning:** 2 Step MacAdams  
**Input:** AC220-240V 50/60Hz  
**Output:** DC 36V 250mA 10W  
**Ambient temp:** -20 °C to 45 °C  
**Class:** II  
**Material:** Fine aluminium 6063A



Recessed Trim

W system	lm system	code
10W	239	RTC6810W



Recessed Trimless

W system	lm system	code
10W	239	TLC6810W