

MOOD DOWNLIGHT

Φ100


Trimless Adjustable Round



cutout : 100mm




Adjustable Optic




Designed for super eye comfort,
minimum glare

| | |
|------------------------------|---|
| IP Rating: | IP20 and IP44 options |
| Optics: | 10°/24°/36°/50° |
| UGR: | < 10 |
| CRI: | 98Ra |
| Lifetime: | > 50,000 hrs (L70 B10) |
| CCT: | 2700K/3000K/3500K/4000K/5000K |
| Typical Source | |
| Efficacy (lm/W): | 110 |
| Control: | On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi |
| Binning: | 2 Step MacAdams |
| Input: | AC 220-240V 50/60Hz |
| Output: | DC 36V 500mA 20W DC 36V 600mA 25W DC 36V 750mA 30W DC 36V 1000mA 40W |
| Ambient temp: | -20 °C to 45 °C |
| Class: | II |
| Optional accessories: | Honeycomb louvre, Solite Lens, Spread Lens, Colour Filter |




30W Ra98 3000K 15°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1.0 | 8966 | 0.28 |
| 2.0 | 2247 | 0.58 |
| 3.0 | 998 | 0.84 |
| 4.0 | 562 | 1.10 |
| 5.0 | 359 | 1.40 |
| 6.0 | 250 | 1.70 |



30W Ra98 3000K 24°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1.0 | 5888 | 0.39 |
| 2.0 | 1457 | 0.77 |
| 3.0 | 652 | 1.20 |
| 4.0 | 367 | 1.50 |
| 5.0 | 235 | 1.90 |
| 6.0 | 163 | 2.30 |



30W Ra98 3000K 36°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1.0 | 2991 | 0.54 |
| 2.0 | 748 | 1.10 |
| 3.0 | 332 | 1.60 |
| 4.0 | 187 | 2.20 |
| 5.0 | 120 | 2.70 |
| 6.0 | 83 | 3.20 |



DuraGreen project:
Poliform Showroom



| W system | lm system | optics | code |
|----------|-----------|--------|----------------------|
| 20W | 1304 | 15° | AFL10020W-TL-30N15-W |
| 20W | 1364 | 24° | AFL10020W-TL-30N24-W |
| 20W | 1312 | 36° | AFL10020W-TL-30N36-W |
| 20W | 1369 | 50° | AFL10020W-TL-30N50-W |



| W system | lm system | optics | code |
|----------|-----------|--------|----------------------|
| 25W | 1595 | 15° | AFL10025W-TL-30N15-W |
| 25W | 1696 | 24° | AFL10025W-TL-30N24-W |
| 25W | 1676 | 36° | AFL10025W-TL-30N36-W |
| 25W | 1715 | 50° | AFL10025W-TL-30N50-W |



| W system | lm system | optics | code |
|----------|-----------|--------|----------------------|
| 30W | 1872 | 15° | AFL10030W-TL-30N15-W |
| 30W | 1940 | 24° | AFL10030W-TL-30N24-W |
| 30W | 1841 | 36° | AFL10030W-TL-30N36-W |
| 30W | 1962 | 50° | AFL10030W-TL-30N50-W |



| W system | lm system | optics | code |
|----------|-----------|--------|----------------------|
| 40W | 1975 | 15° | AFL10040W-TL-30N15-W |
| 40W | 2088 | 24° | AFL10040W-TL-30N24-W |
| 40W | 2105 | 36° | AFL10040W-TL-30N36-W |
| 40W | 2380 | 50° | AFL10040W-TL-30N50-W |



MOOD light fittings, stylishly designed with trendy colors and high-quality materials, radiate sophistication and elegance. They offer endless possibilities and exceptional versatility, easily adapting to any space.





Black Matt



White Matt



Silver Matt



Black Specular



Silver Specular




Gold Specular



Grey Specular

D for DuraGreen Design

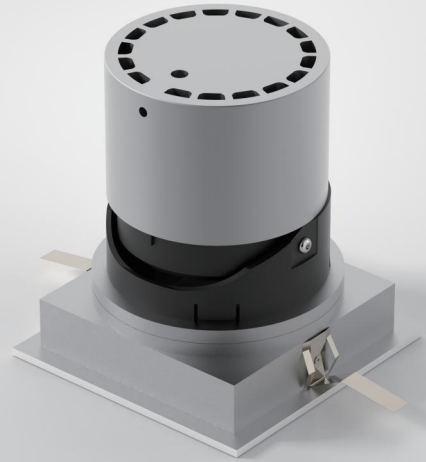

Specification Code

| Type | Cut out | Power | Colour Temp | Driver | Beam Width | Bezel Colour | Baffle Colour | Options |
|------------------------------|--------------------|------------|--------------------------------------|----------------------|------------------|---------------------------------------|-------------------------------|-------------------------------|
| MF | 75 | 08W | 30 | N | 24 | W | B | C |
| MF/Fixed | 22/22mm | | 27/2700K | M/Mains Dim | 05/5° | W/White | B/Black Specular | C/Clear Lens |
| AF/Adjustable | 33/33mm | | 30/3000K | D/DALI | 10/10° | B/Black | S/Silver Specular | F/Frosted Lens |
| MFL/Lens type, Fixed | 35/35mm 40/40mm | | 40/4000K WD/Warm Dim | 0/0-10V N/Non Dim | 13/13° 15/15° | L/Polished Chrome G/Polished Brass | W/White Matt BM/Black Matt | H/Honeycomb S/Spread Lense |
| AFL/Lens type, Adjustable | 45/45mm 55/55mm | | 1840/1800K-4000K 2765/2700K-6500K | X/No Driver | 20/20° 24/24° | J/Antique Bronze S/Satin Nickle | | |
| MFW/Wall Wash | 58/58mm | | | | 30/30° | | | |
| MFZ/Zoomable | 75/75mm | | | | 36/36° | | | |
| MFP/Pinhole | 80/80mm | | | | 50/50° | | | |
| MFQ/Fixed Square | 100/100mm | | | | | | | |