

# MOOD PINHOLE



## Φ58 Adjustable Round



cutout :58mm



Adjustable Optic



**IP Rating:** IP20 and IP44 options  
**Optics:** 10°/24°/36°/50°  
**UGR:** <10  
**CRI:** 98Ra  
**Lifetime:** >50,000 hrs (L70 B10)  
**CCT:** 2700K/3000K/3500K/4000K/5000K/  
 2000K-3000K/1800K-4000K/2700K-6000K


**Typical Source**  
**Efficacy (lm/W):** 110  
**Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi  
**Binning:** 2 Step MacAdams  
**Input:** AC220-240V 50/60Hz  
**Output:** DC 36V 150mA 6W

DC 36V 200mA 8W  
 DC 36V 250mA 10W

**Ambient temp:** -20 °C to 45 °C


**Class:** II

**Optional accessories:** Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter




10W Ra98 3000K 10°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 8431  | 0.11 |
| 1.0  | 2108  | 0.21 |
| 1.5  | 937   | 0.32 |
| 2.0  | 527   | 0.43 |
| 2.5  | 337   | 0.53 |
| 3.0  | 234   | 0.64 |



10W Ra98 3000K 24°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 4847  | 0.21 |
| 1.0  | 1212  | 0.43 |
| 1.5  | 539   | 0.64 |
| 2.0  | 303   | 0.86 |
| 2.5  | 194   | 1.07 |
| 3.0  | 135   | 1.29 |




10W Ra98 3000K 36°


| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5  | 2553  | 0.32 |
| 1.0  | 638   | 0.65 |
| 1.5  | 284   | 0.97 |
| 2.0  | 160   | 1.29 |
| 2.5  | 102   | 1.61 |
| 3.0  | 71    | 1.94 |



DuraGreen project:  
Black Stone Hillside Hotel



| <b>W system</b> | <b>lm system</b> | <b>optics</b> | <b>code</b>      |
|-----------------|------------------|---------------|------------------|
| 6W              | 328              | 10°           | AFP6006W-30N10-W |
| 6W              | 407              | 24°           | AFP6006W-30N24-W |
| 6W              | 417              | 36°           | AFP6006W-30N36-W |
| 6W              | 411              | 50°           | AFP6006W-30N50-W |



| <b>W system</b> | <b>lm system</b> | <b>optics</b> | <b>code</b>      |
|-----------------|------------------|---------------|------------------|
| 8W              | 384              | 10°           | AFP6008W-30N10-W |
| 8W              | 501              | 24°           | AFP6008W-30N24-W |
| 8W              | 517              | 36°           | AFP6008W-30N36-W |
| 8W              | 512              | 50°           | AFP6008W-30N50-W |



| <b>W system</b> | <b>lm system</b> | <b>optics</b> | <b>code</b>      |
|-----------------|------------------|---------------|------------------|
| 10W             | 411              | 10°           | AFP6010W-30N10-W |
| 10W             | 554              | 24°           | AFP6010W-30N24-W |
| 10W             | 567              | 36°           | AFP6010W-30N36-W |
| 10W             | 558              | 50°           | AFP6010W-30N50-W |



MOOD light fittings, stylishly designed with trendy colors and high-quality materials, radiate sophistication and elegance. They offer endless possibilities and exceptional versatility, easily adapting to any space.





Black Matt



White Matt




Silver Matt



Black Specular



Silver Specular




Gold Specular



Grey Specular

D for DuraGreen Design

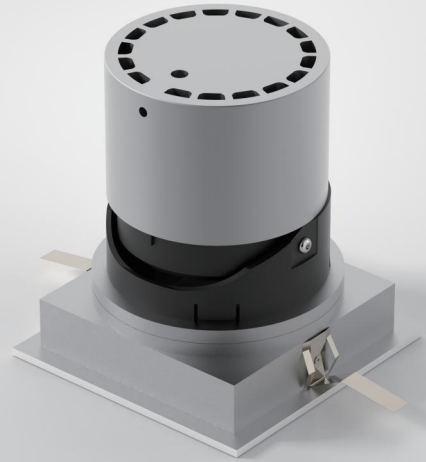

## Specification Code

| Type                         | Cut out            | Power      | Colour Temp                          | Driver               | Beam Width       | Bezel Colour                          | Baffle Colour                 | Options                       |
|------------------------------|--------------------|------------|--------------------------------------|----------------------|------------------|---------------------------------------|-------------------------------|-------------------------------|
| <b>MF</b>                    | <b>75</b>          | <b>08W</b> | <b>30</b>                            | <b>N</b>             | <b>24</b>        | <b>W</b>                              | <b>B</b>                      | <b>C</b>                      |
| MF/Fixed                     | 22/22mm            |            | 27/2700K                             | M/Mains Dim          | 05/5°            | W/White                               | B/Black Specular              | C/Clear Lens                  |
| AF/Adjustable                | 33/33mm            |            | 30/3000K                             | D/DALI               | 10/10°           | B/Black                               | S/Silver Specular             | F/Frosted Lens                |
| MFL/Lens type,<br>Fixed      | 35/35mm<br>40/40mm |            | 40/4000K<br>WD/Warm Dim              | 0/0-10V<br>N/Non Dim | 13/13°<br>15/15° | L/Polished Chrome<br>G/Polished Brass | W/White Matt<br>BM/Black Matt | H/Honeycomb<br>S/Spread Lense |
| AFL/Lens type,<br>Adjustable | 45/45mm<br>55/55mm |            | 1840/1800K-4000K<br>2765/2700K-6500K | X/No Driver          | 20/20°<br>24/24° | J/Antique Bronze<br>S/Satin Nickle    |                               |                               |
| MFW/Wall Wash                | 58/58mm            |            |                                      |                      | 30/30°           |                                       |                               |                               |
| MFZ/Zoomable                 | 75/75mm            |            |                                      |                      | 36/36°           |                                       |                               |                               |
| MFP/Pinhole                  | 80/80mm            |            |                                      |                      | 50/50°           |                                       |                               |                               |
| MFQ/Fixed Square             | 100/100mm          |            |                                      |                      |                  |                                       |                               |                               |