

# MOOD DOWNLIGHT

Φ75


Trimless Adjustable Round




cutout :75mm



Adjustable Optic




- IP Rating:** IP20 and IP44 options
- Optics:** 5°/10°/24°/36°/50°
- UGR:** <10
- CRI:** 98Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 2700K/3000K/3500K/4000K/5000K/  
2000K-3000K/1800K-4000K/2700K-6000K
- Typical Source Efficacy (lm/W):** 110
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 3V 650mA 3W  
DC 36V 200mA 8W  
DC 36V 250mA 10W  
DC 36V 300mA 12W  
DC 36V 350mA 15W
- Ambient temp:** -20 °C to 45 °C
- Class:** II
- Optional accessories:** Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter




15W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	19856	0.12
1.0	4964	0.23
1.5	2206	0.35
2.0	1241	0.46
2.5	794	0.58
3.0	552	0.69




15W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	9636	0.20
1.0	2409	0.41
1.5	1071	0.61
2.0	602	0.81
2.5	385	1.02
3.0	268	1.22



15W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	5780	0.30
1.0	1445	0.60
1.5	642	0.89
2.0	361	1.19
2.5	231	1.49
3.0	161	1.79



15W Ra98 3000K 50°

h(m)	E(lx)	D(m)
0.5	2268	0.46
1.0	567	0.92
1.5	252	1.37
2.0	142	1.83
2.5	91	2.29
3.0	63	2.75



DuraGreen project:  
Poliform Showroom

W system	lm system	optics	code
3W	152	5°	AFL7503W-TL-30N05-W

W system	lm system	optics	code
8W	415	10°	AFL7508W-TL-30N10-W
8W	535	15°	AFL7508W-TL-30N15-W
8W	598	24°	AFL7508W-TL-30N24-W
8W	632	36°	AFL7508W-TL-30N36-W
8W	573	50°	AFL7508W-TL-30N50-W

W system	lm system	optics	code
10W	450	10°	AFL7510W-TL-30N10-W
10W	590	15°	AFL7510W-TL-30N15-W
10W	618	24°	AFL7510W-TL-30N24-W
10W	699	36°	AFL7510W-TL-30N36-W
10W	650	50°	AFL7510W-TL-30N50-W

W system	lm system	optics	code
12W	531	10°	AFL7512W-TL-30N10-W
12W	755	15°	AFL7512W-TL-30N15-W
12W	860	24°	AFL7512W-TL-30N24-W
12W	901	36°	AFL7512W-TL-30N36-W
12W	835	50°	AFL7512W-TL-30N50-W

W system	lm system	optics	code
15W	568	10°	AFL7515W-TL-30N10-W
15W	858	15°	AFL7515W-TL-30N15-W
15W	929	24°	AFL7515W-TL-30N24-W
15W	1041	36°	AFL7515W-TL-30N36-W
15W	952	50°	AFL7515W-TL-30N50-W



MOOD light fittings, stylishly designed with trendy colors and high-quality materials, radiate sophistication and elegance. They offer endless possibilities and exceptional versatility, easily adapting to any space.





Black Matt



White Matt




Silver Matt



Black Specular





Silver Specular



Gold Specular



Grey Specular

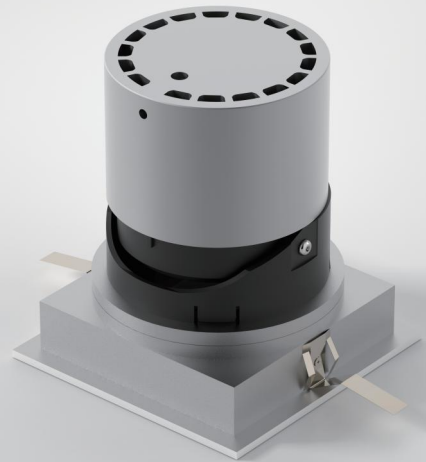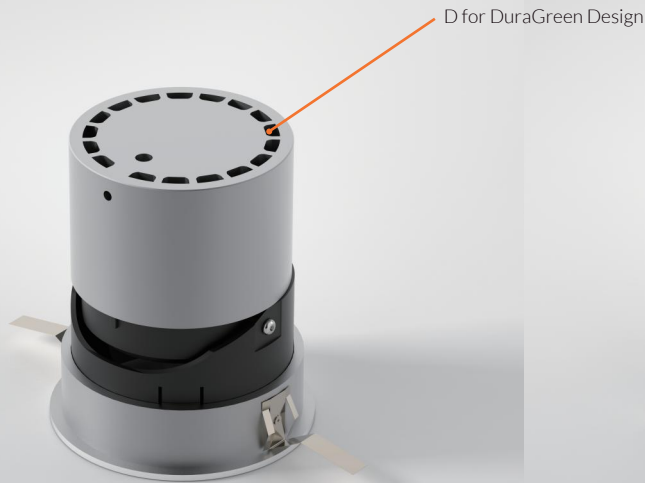

## Specification Code

Type	Cut out	Power	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
<b>MF</b>	<b>75</b>	<b>08W</b>	<b>30</b>	<b>N</b>	<b>24</b>	<b>W</b>	<b>B</b>	<b>C</b>
MF/Fixed	22/22mm		27/2700K	M/Mains Dim	05/5°	W/White	B/Black Specular	C/Clear Lens
AF/Adjustable	33/33mm		30/3000K	D/DALI	10/10°	B/Black	S/Silver Specular	F/Frosted Lens
MFL/Lens type, Fixed	35/35mm 40/40mm		40/4000K WD/Warm Dim	0/0-10V N/Non Dim	13/13° 15/15°	L/Polished Chrome G/Polished Brass	W/White Matt BM/Black Matt	H/Honeycomb S/Spread Lense
AFL/Lens type, Adjustable	45/45mm 55/55mm		1840/1800K-4000K 2765/2700K-6500K	X/No Driver	20/20° 24/24°	J/Antique Bronze S/Satin Nickle		
MFW/Wall Wash	58/58mm				30/30°			
MFZ/Zoomable	75/75mm				36/36°			
MFP/Pinhole	80/80mm				50/50°			
MFQ/Fixed Square	100/100mm							