


# FOLD


## Φ45 Surface Adjustable Spotlight



Adjustable Optic




<b>IP Rating:</b>	IP20 and IP44 options
<b>Optics:</b>	15°/24°/36°/50°
<b>UGR:</b>	< 10
<b>CRI:</b>	98Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	2700K/3000K
<b>Typical Source</b>	
<b>Efficacy (lm/W):</b>	110
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning:</b>	2 Step MacAdams
<b>Input:</b>	AC220-240V 50/60Hz
<b>Output:</b>	DC 36V 200mA 8W DC 36V 250mA 10W
<b>Ambient temp:</b>	-20 °C to 45 °C
<b>Class:</b>	II
<b>Optional accessories:</b>	Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	8822	0.15
1.0	2206	0.30
1.5	980	0.45
2.0	551	0.60
2.5	353	0.76
3.0	245	0.91




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	6615	0.23
1.0	1654	0.46
1.5	735	0.69
2.0	413	0.92
2.5	265	1.15
3.0	184	1.37





10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	3458	0.32
1.0	864	0.65
1.5	384	0.97
2.0	216	1.29
2.5	138	1.61
3.0	96	1.94



10W Ra98 3000K 50°

h(m)	E(lx)	D(m)
0.5	2048	0.45
1.0	512	0.89
1.5	228	1.34
2.0	128	1.79
2.5	82	2.24
3.0	57	2.68

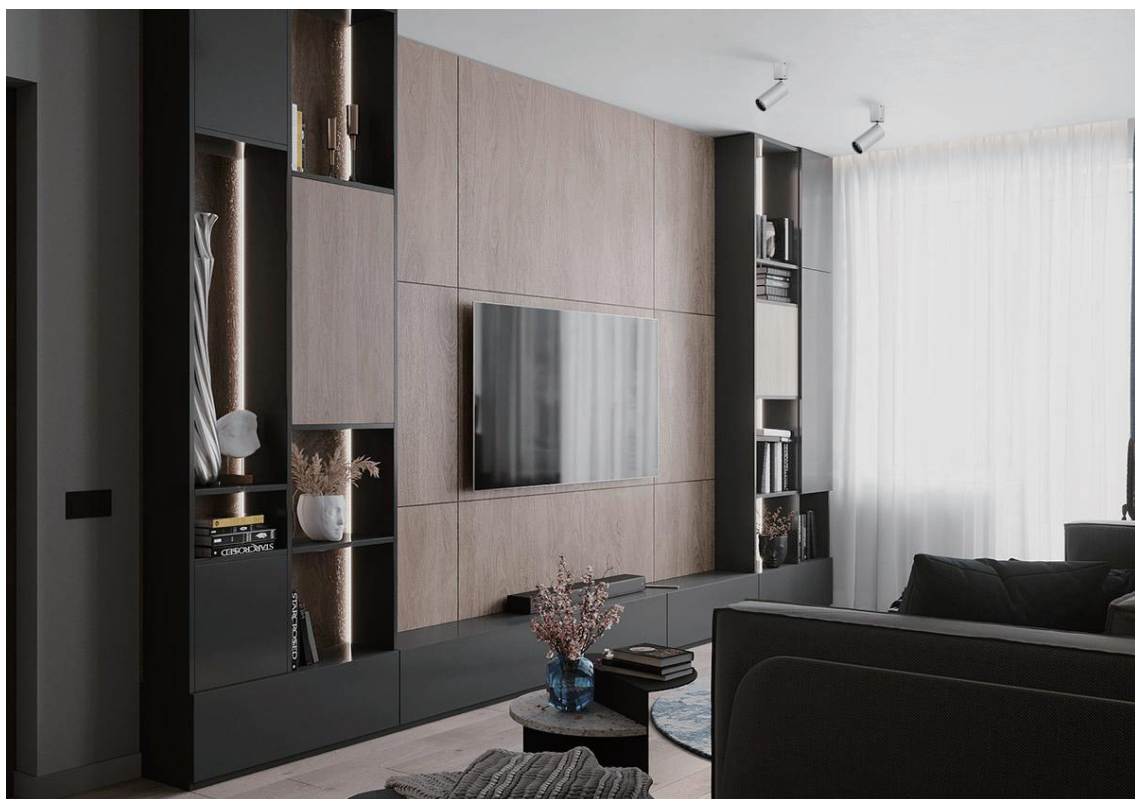

<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
10W	501	15°	AFS4510W-30N15-B
10W	653	24°	AFS4510W-30N24-B
10W	692	36°	AFS4510W-30N36-B
10W	676	50°	AFS4510W-30N50-B