

FLOW

Recessed 30 Spots Linear



cutout: 1150*48mm



Fixed




White Painted



Black Painted

IP Rating:	IP20 and IP44 options
Optics:	12°/24°/38°/50°/Wall Wash
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K/RGB
Typical Source Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 24V 12W
Ambient temp:	-20 °C to 45 °C
Class:	II

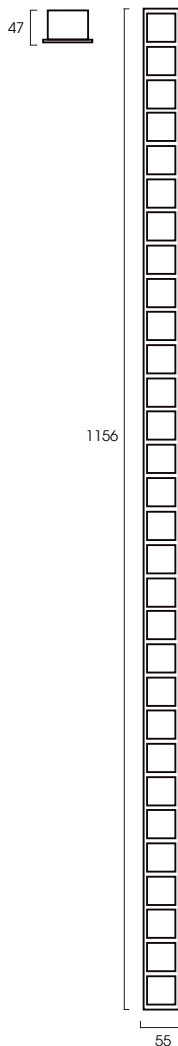



DuraGreen project:
Versace Showroom



W system	lm system	optics	code
12W	1036	12°	FFL3024V12W-30N12-B
12W	1088	24°	FFL3024V12W-30N24-B
12W	1143	38°	FFL3024V12W-30N38-B
12W	1117	50°	FFL3024V12W-30N50-B