


HALO 48V

Φ50 48V Pendant




Ceiling hook to move light point

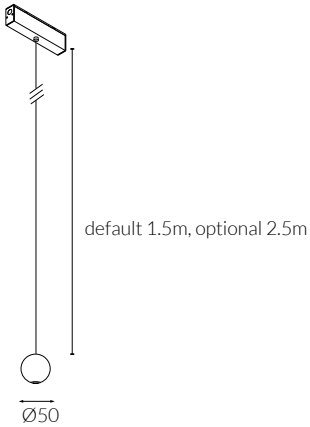

 Anodized Grey

IP Rating:	IP20
Optics:	15°/25°/30°/50°/60°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	48 VDC
Output:	DC 3V 650mA 3W
Ambient temp:	-20 °C to 45 °C
Class:	III



W system	lm system	optics	code
3W	148	15°	M22S5003W-30N15-SG
3W	157	25°	M22S5003W-30N25-SG
3W	179	30°	M22S5003W-30N30-SG
3W	162	50°	M22S5003W-30N50-SG
3W	159	60°	M22S5003W-30N60-SG