


# FLOW

## Surface 3 Spots Linear



Fixed

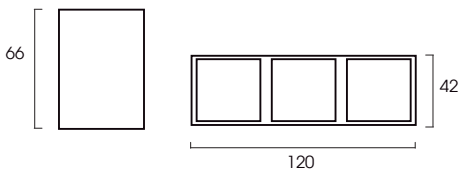


White Painted




Black Painted

<b>IP Rating:</b>	IP20 and IP44 options
<b>Optics:</b>	12°/24°/38°/50°/Wall Wash
<b>UGR:</b>	< 10
<b>CRI:</b>	92Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	3000K
<b>Typical Source</b>	
<b>Efficacy (lm/W):</b>	113
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning</b>	2 Step MacAdams
<b>Input:</b>	AC220-240V 50/60Hz
<b>Output:</b>	DC 36V 200mA 8W DC 36V 250mA 10W
<b>Ambient temp:</b>	-20 °C to 45 °C
<b>Class:</b>	II




10W Ra92 3000K 12°

h(m)	E(lx)	D(m)
0.5	11477	0.13
1.0	2869	0.27
1.5	1275	0.40
2.0	717	0.53
2.5	459	0.67
3.0	319	0.80




10W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	7647	0.16
1.0	1912	0.33
1.5	850	0.49
2.0	478	0.66
2.5	306	0.82
3.0	212	0.98




10W Ra92 3000K 38°

h(m)	E(lx)	D(m)
0.5	5017	0.25
1.0	1254	0.50
1.5	557	0.75
2.0	314	1.00
2.5	201	1.26
3.0	139	1.51




10W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	2771	0.43
1.0	693	0.87
1.5	308	1.30
2.0	173	1.73
2.5	111	2.16
3.0	77	2.60



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
8W	707	12°	SFL0308W-30N12-B
8W	729	24°	SFL0308W-30N24-B
8W	703	38°	SFL0308W-30N38-B
8W	696	50°	SFL0308W-30N50-B



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
10W	869	12°	SFL0310W-30N12-B
10W	891	24°	SFL0310W-30N24-B
10W	868	38°	SFL0310W-30N38-B
10W	861	50°	SFL0310W-30N50-B