


FLOW

Surface 10 Spots Linear



Fixed

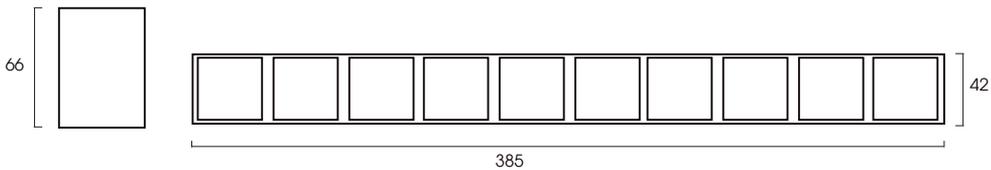


White Painted




Black Painted

- IP Rating:** IP20 and IP44 options
- Optics:** 12°/24°/38°/50°/Wall Wash
- UGR:** < 10
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K
- Typical Source Efficacy (lm/W):** 113
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 36V 500mA 20W
DC 36V 600mA 25W
- Ambient temp:** -20 °C to 45 °C
- Class:** II




25W Ra92 3000K 24°

h(m)	E(lx)	D(m)
0.5	12084	0.25
1.0	3021	0.50
1.5	1343	0.75
2.0	755	1.00
2.5	483	1.25
3.0	336	1.50



25W Ra92 3000K 38°

h(m)	E(lx)	D(m)
0.5	10063	0.31
1.0	2516	0.61
1.5	1118	0.92
2.0	629	1.22
2.5	403	1.53
3.0	280	1.83



25W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	5483	0.46
1.0	1371	0.92
1.5	609	1.38
2.0	343	1.84
2.5	219	2.30
3.0	152	2.76



W system	lm system	optics	code
20W	1636	12°	SFL1020W-30N12-B
20W	1656	24°	SFL1020W-30N24-B
20W	1584	38°	SFL1020W-30N38-B
20W	1672	50°	SFL1020W-30N50-B



W system	lm system	optics	code
25W	1889	12°	SFL1025W-30N12-B
25W	1883	24°	SFL1025W-30N24-B
25W	1917	38°	SFL1025W-30N38-B
25W	1842	50°	SFL1025W-30N50-B