

HALO

Φ50

Ball Pendant





Fixed Optic





Ceiling hook to move light point



Anodized Grey

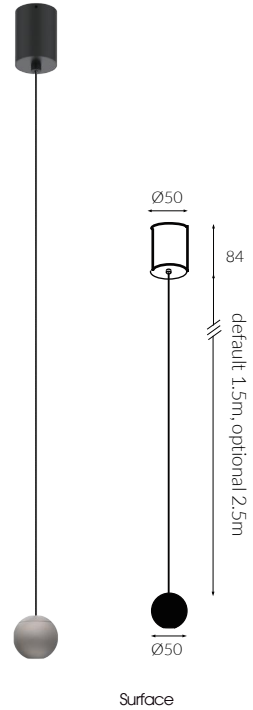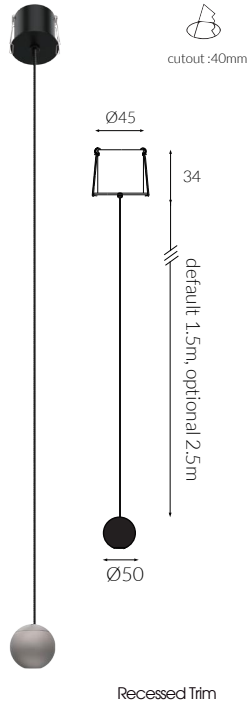

IP Rating:	IP20
Optics:	15°/25°/30°/50°/60°
UGR:	<10
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	3000K
Typical Source Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 3V 650mA 3W
Ambient temp:	-20 °C to 45 °C
Class:	II



W system	lm system	optics	code
3W	148	15°	PVSR55003W-30N15-AG
3W	157	25°	PVSR55003W-30N25-AG
3W	179	30°	PVSR55003W-30N30-AG
3W	162	50°	PVSR55003W-30N50-AG
3W	159	60°	PVSR55003W-30N60-AG

W system	lm system	optics	code
3W	148	15°	PVSS55003W-30N15-AG
3W	157	25°	PVSS55003W-30N25-AG
3W	179	30°	PVSS55003W-30N30-AG
3W	162	50°	PVSS55003W-30N50-AG
3W	159	60°	PVSS55003W-30N60-AG