

CONVEX

Φ70

Amber Pendant



Fixed Optic



Ceiling hook to move light point




White Painted

Black Painted


Satin Gold



cutout: 58mm

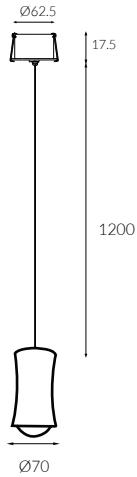


Recessed Trim

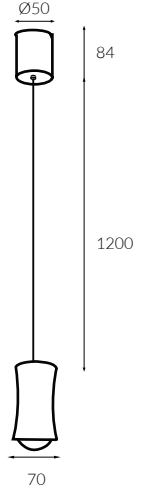

Surface

IP Rating:	IP20
Optics:	/
UGR:	<10
CRI:	/
Lifetime:	>50,000 hrs (L70 B10)
CCT:	Amber
Typical Source	
Efficacy (lm/W):	23
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	7W
Ambient temp:	-20 °C to 45 °C
Class:	II



W system	lm system	optics	code
Amber			
7W	235	-	PSS7007W-ABN00-SG

W system	lm system	optics	code
Amber			
7W	235	-	PSR7007W-ABN00-SG