

# CAPRI 48V



Φ114





Ceiling hook to move light point

○ White Painted

● Black Painted

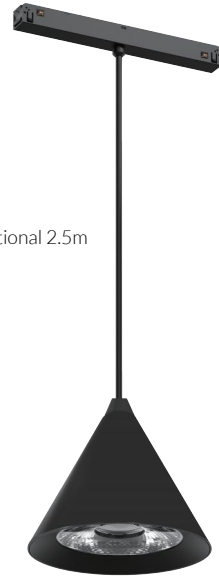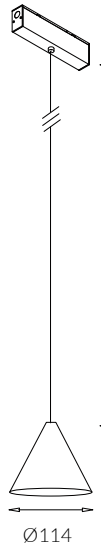

Fixed Pendant

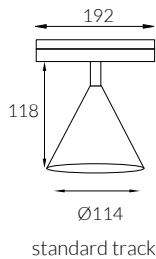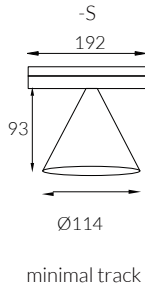


Surface Downlight

<b>IP Rating:</b>	IP20
<b>Optics:</b>	10°/24°/36°/55°
<b>UGR:</b>	<10
<b>CRI:</b>	98Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	2700K/3000K/3500K/4000K/5000K/2700K-6000K
<b>Typical Source</b>	
<b>Efficacy (lm/W):</b>	110
<b>Control:</b>	On/off, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning</b>	2 Step MacAdams
<b>Input:</b>	48 VDC
<b>Output:</b>	DC 36V 150mA 6W DC 36V 200mA 8W
<b>Ambient temp:</b>	-20 °C to 45 °C
<b>Class:</b>	III



W system	lm system	optics	code
8W	445	10°	M22ST11408W-30N10-B
8W	738	24°	M22ST11408W-30N24-B
8W	736	36°	M22ST11408W-30N36-B
8W	672	55°	M22ST11408W-30N55-B



W system	lm system	optics	code
8W	445	10°	M22T11408W-30N10-SG
8W	738	24°	M22T11408W-30N24-SG
8W	736	36°	M22T11408W-30N36-SG
8W	672	55°	M22T11408W-30N55-SG