

ORBIT

Φ45 Recessed Contour Spotlight




Adjustable Optic




 Black Painted




Recessed Trim

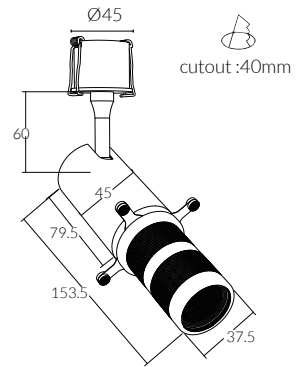

Recessed Trimless

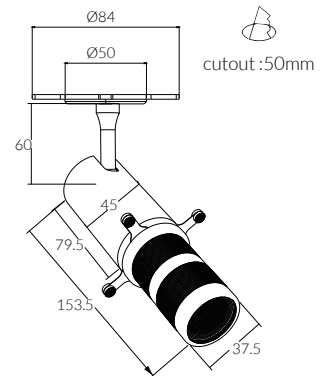


- IP Rating:** IP20
- Optics:** Framing
- UGR:** < 10
- CRI:** 98Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 2700K/3000K
- Typical Source**
- Efficacy (lm/W):** 110
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 36V 250mA 10W
- Ambient temp:** -20 °C to 45 °C
- Class:** II



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25

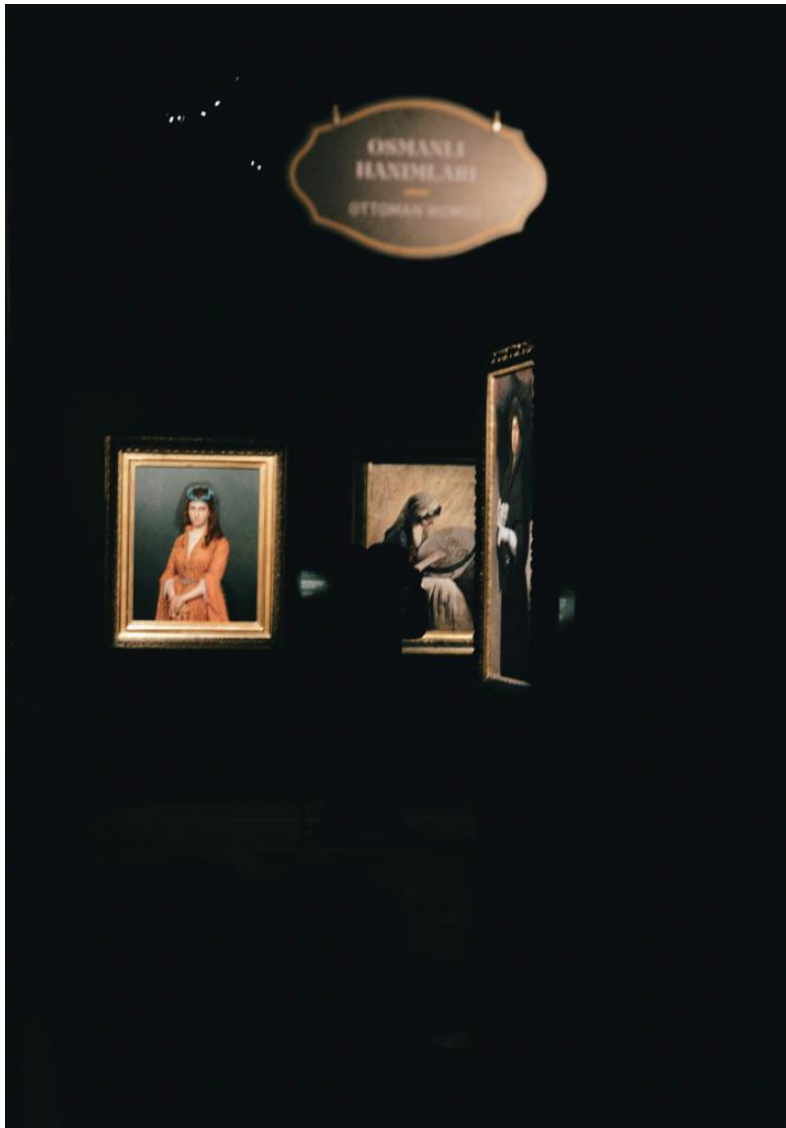

Recessed Trim

W system	lm system	code
10W	239	MARC4510W



Recessed Trimless

W system	lm system	code
10W	239	MATC4510W