

78 Long Snoot

78 Short Snoot

78 Semi

# ACME SPY

## Φ78 Short Snoot Downlight



cutout:78mm



Adjustable Optic



### Structure




- IP Rating:** IP20 and IP44 options
- Optics:** 15°/24°/36°/50°
- UGR:** < 10
- CRI:** 98Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 2700K/3000K/3500K/4000K/5000K/  
2000K-3000K/1800K-4000K/2700K-6000K

### Typical Source



- Efficacy (lm/W):** 110
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 36V 250mA 10W
- Ambient temp:** -20 °C to 45 °C
- Class:** II
- Material:** Fine aluminium 6063A



Recessed Trim




Recessed Trimless




10W Ra98 3000K 15°

h(m)	E(lx)	
0.5	8822	0.15
1.0	2206	0.30
1.5	980	0.45
2.0	551	0.60
2.5	353	0.76
3.0	245	0.91




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	6615	0.23
1.0	1654	0.46
1.5	735	0.69
2.0	413	0.92
2.5	265	1.15
3.0	184	1.37




10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	3458	0.32
1.0	864	0.65
1.5	384	0.97
2.0	216	1.29
2.5	138	1.61
3.0	96	1.94



10W Ra98 3000K 50°

h(m)	E(lx)	D(m)
0.5	2048	0.45
1.0	512	0.89
1.5	228	1.34
2.0	128	1.79
2.5	82	2.24
3.0	57	2.68

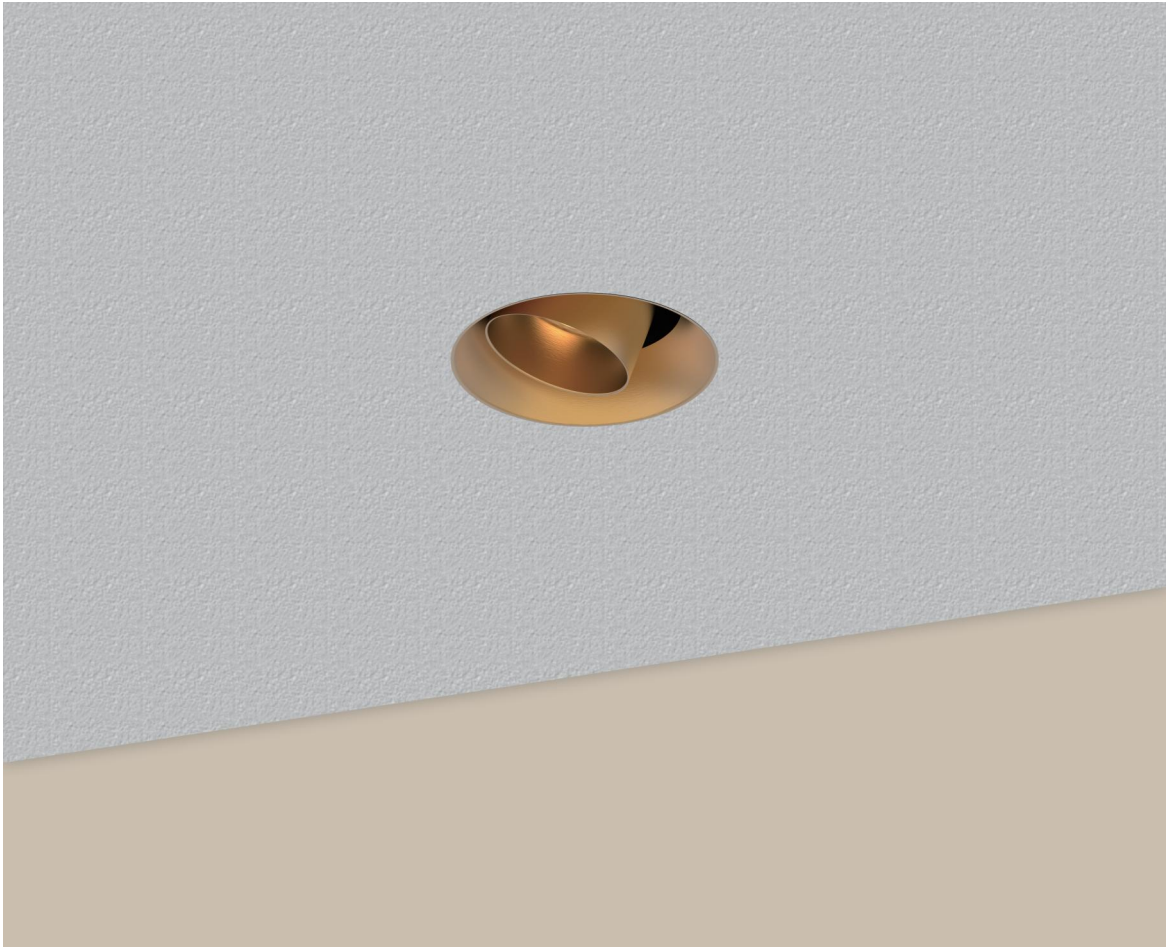

<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
10W	501	15°	AFL7810W-SS-30N15-SB
10W	653	24°	AFL7810W-SS-30N24-SB
10W	692	36°	AFL7810W-SS-30N36-SB
10W	676	50°	AFL7810W-SS-30N50-SB



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
10W	501	15°	AFL7810W-SS-TL-30N15-SB
10W	653	24°	AFL7810W-SS-TL-30N24-SB
10W	692	36°	AFL7810W-SS-TL-30N36-SB
10W	676	50°	AFL7810W-SS-TL-30N50-SB