


# WASHFLEX

## Outdoor Linear Wall Grazer




Fixed Optic

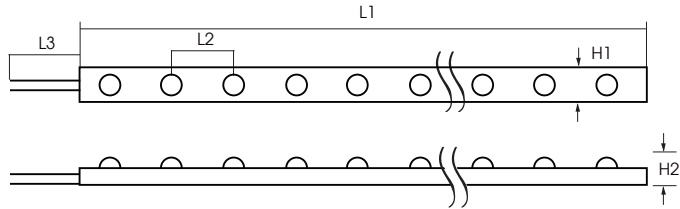


L1(mm)	5015	L2(mm)	35.7
L3(mm)	328		
H1(mm)	19.5	H2(mm)	10

### Accessories not included




CHY-1  
aluminium profile



CHY-2  
aluminium profile  
with glare shield

<b>IP Rating:</b>	IP67
<b>Optics:</b>	15°/30°/25°/45°
<b>CRI:</b>	>80Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	RGBW
<b>LEDS/M:</b>	28pcs
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning</b>	2 Step MacAdams
<b>Voltage:</b>	DC 24V
<b>Power(W):</b>	18W/m,24W/m
<b>Ambient temp:</b>	-20 °C to 45 °C
<b>Class:</b>	III



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
R=4W	35Lm/W	25*45°	CYH201028-24W-2545-RGBW
G=4.1W	67Lm/W		
B=4.3W	11Lm/W		
W=7.5W	96Lm/W		
CW=7.5W	96Lm/W		