

EVOLINE





reddot winner 2023
lighting design





74X32 Recessed 3 Spots Trimless Line

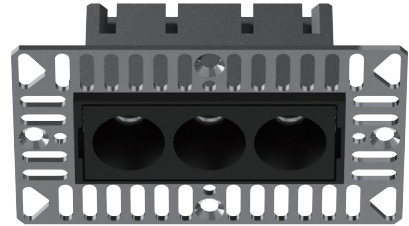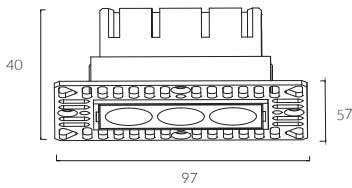


CUTOUT: 74x32mm



baffle


-  matt white painted
-  matt black painted

- IP Rating:** IP20 and IP44 options
- Optics:** 14°/25°/35°
- UGR:** < 10
- CRI:** 92Ra
- Lifetime:** > 50,000 hrs (L70 B10)
- CCT:** 3000K/3500K/2700K-6000K
- Typical Source**
- Efficacy (lm/W):** 113
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 9V 500mA 8W
DC 9V 700mA 8W
- Ambient temp:** -20 °C to 45 °C
- Class:** II
- Material:** Fine aluminium 6063A




8W Ra92 3000K 14°

h(m)	E(x)	D(m)
0.5	7614	0.14
1.0	1904	0.28
1.5	846	0.42
2.0	476	0.56
2.5	305	0.70
3.0	212	0.84



8W Ra92 3000K 25°

h(m)	E(x)	D(m)
0.5	2824	0.25
1.0	706	0.50
1.5	314	0.75
2.0	176	1.00
2.5	113	1.26
3.0	78	1.51




8W Ra92 3000K 35°


h(m)	E(x)	D(m)
0.5	2277	0.31
1.0	569	0.62
1.5	253	0.92
2.0	142	1.23
2.5	91	1.54
3.0	63	1.85



DuraGreen project:
Guangzhou Private Club




W system	lm system	optics	code
6W	305	14°	ETL0306W-30N14-B
6W	296	25°	ETL0306W-30N25-B
6W	375	35°	ETL0306W-30N35-B




W system	lm system	optics	code
8W	377	14°	ETL0308W-30N14-B
8W	372	25°	ETL0308W-30N25-B
8W	491	35°	ETL0308W-30N35-B

EVOLINE

MUSE
DESIGN
AWARDS
2023
GOLD
WINNER

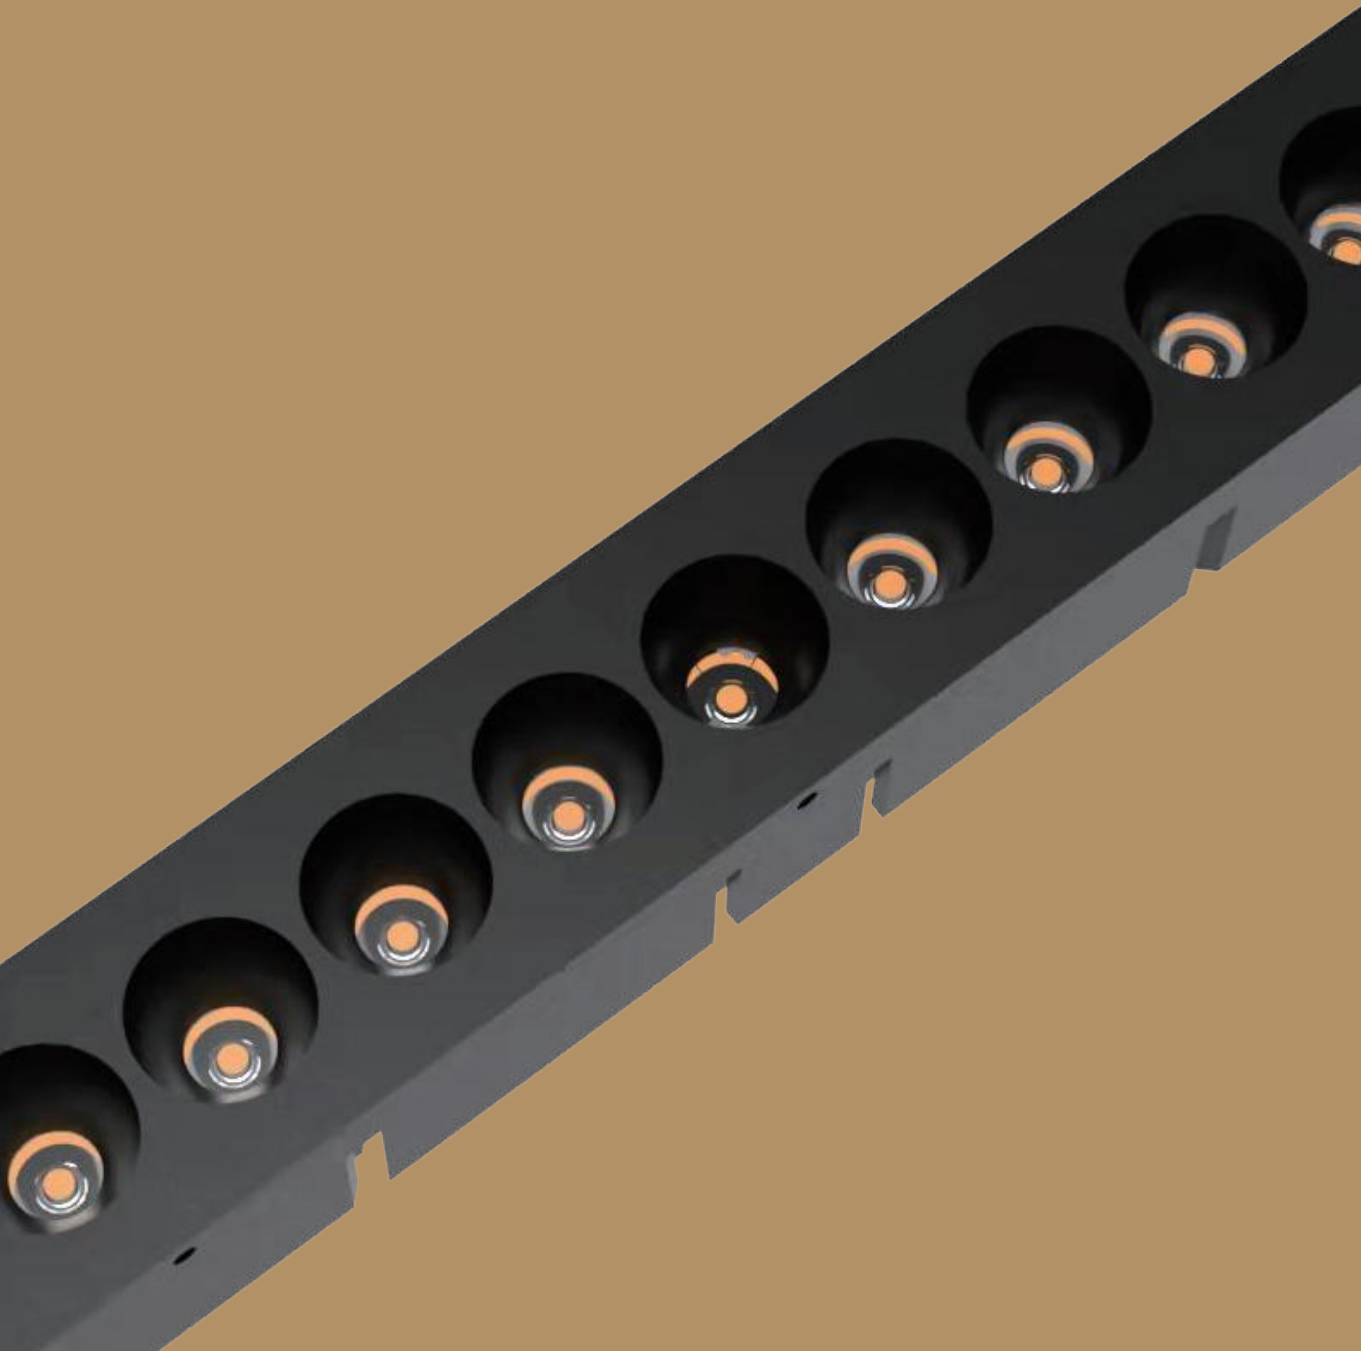

The charm of this line resides in its delicate elegance and unobtrusive nature. The refined simplicity of the fixtures' design allows them to meld seamlessly in various settings.

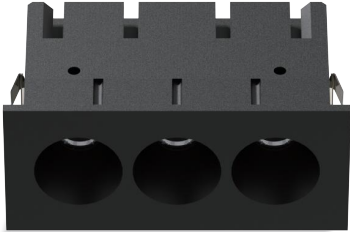

red dot winner 2023
lighting design

