

BELLA

Φ41 Recessed Zoomable 20°-50° Spotlight



Adjustable Optic



White Painted


Black Painted

Antique Bronze


Brushed Grey




Recessed Trim



Recessed Trimless

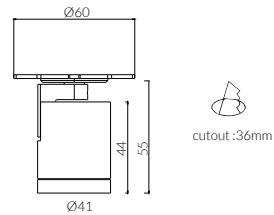


- IP Rating:** IP20
- Optics:** Zoomable 20°-50°
- UGR:** <17
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K/3500K/2700-6000K
- Typical Source Efficacy (lm/W):** 96
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 12V 350mA 6W
- Ambient temp:** -20 C to 45 C
- Class:** II
- Material:** Fine aluminium 6063A




6W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2355	0.20
1.0	589	0.40
1.5	262	0.59
2.0	147	0.79
2.5	94	0.99
3.0	65	1.19




6W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	1378	0.29
1.0	344	0.58
1.5	153	0.88
2.0	86	1.17
2.5	55	1.46
3.0	38	1.75



6W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	616	0.47
1.0	154	0.95
1.5	68	1.42
2.0	38	1.90
2.5	25	2.37
3.0	17	2.85

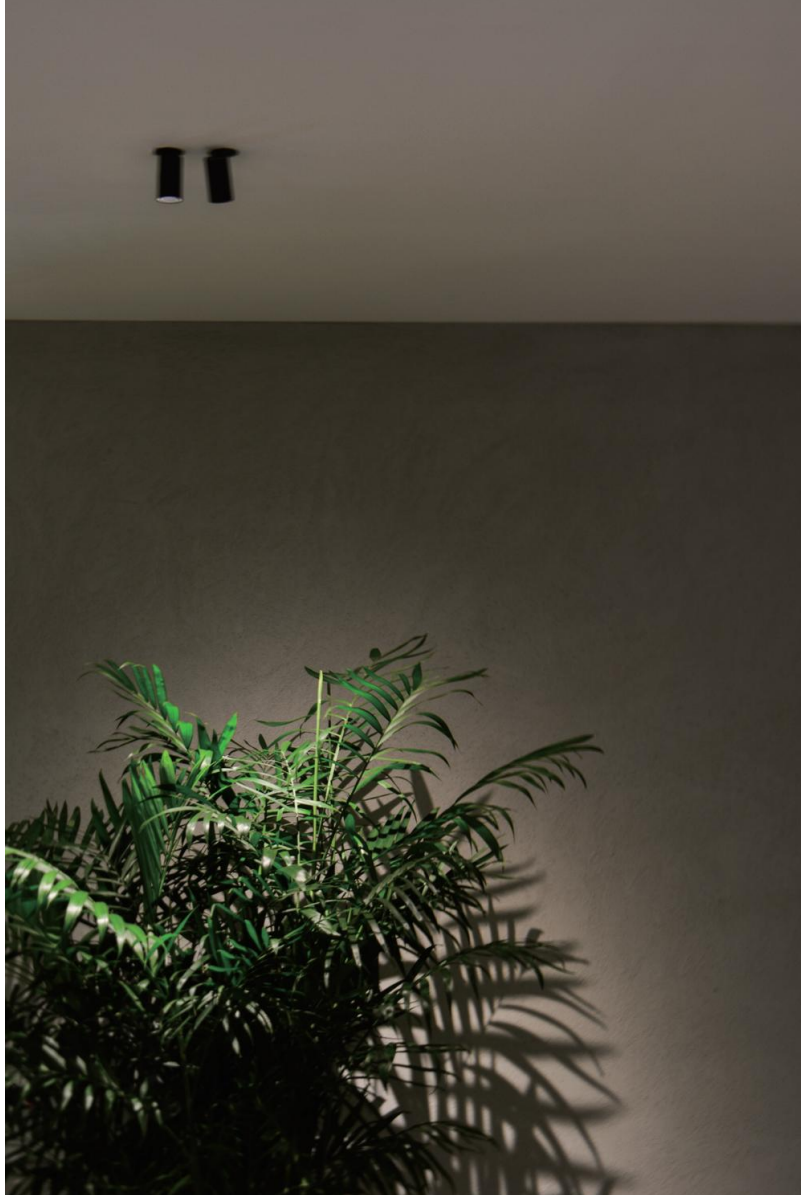

W system	lm system	optics	code
6W	292-296	20°- 50°	RT4106W-30N2050-B



W system	lm system	optics	code
6W	292-296	20°- 50°	TL4106W-30N2050-B