




# BELLA

## Φ41 Recessed Zoomable 20°-50° Spotlight




Adjustable Optic



-  White Painted
-  Black Painted
-  Antique Bronze
-  Brushed Grey




Recessed Trim



cutout: 40mm




Recessed Trimless




cutout: 36mm

- IP Rating:** IP20
- Optics:** Zoomable 20°-50°
- UGR:** <17
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 3000K/3500K/2700-6000K
- Typical Source Efficacy (lm/W):** 96
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning:** 2 Step MacAdams
- Input:** AC220-240V 50/60Hz
- Output:** DC 12V 600mA 8W
- Ambient temp:** -20 C to 45 C
- Class:** II
- Material:** Fine aluminium 6063A




8W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	2978	0.21
1.0	745	0.42
1.5	331	0.63
2.0	186	0.84
2.5	119	1.04
3.0	83	1.25




8W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	1805	0.30
1.0	451	0.59
1.5	201	0.89
2.0	113	1.18
2.5	72	1.48
3.0	50	1.78



8W Ra92 3000K 50°

h(m)	E(lx)	D(m)
0.5	795	0.49
1.0	199	0.97
1.5	88	1.46
2.0	50	1.94
2.5	32	2.43
3.0	22	2.91

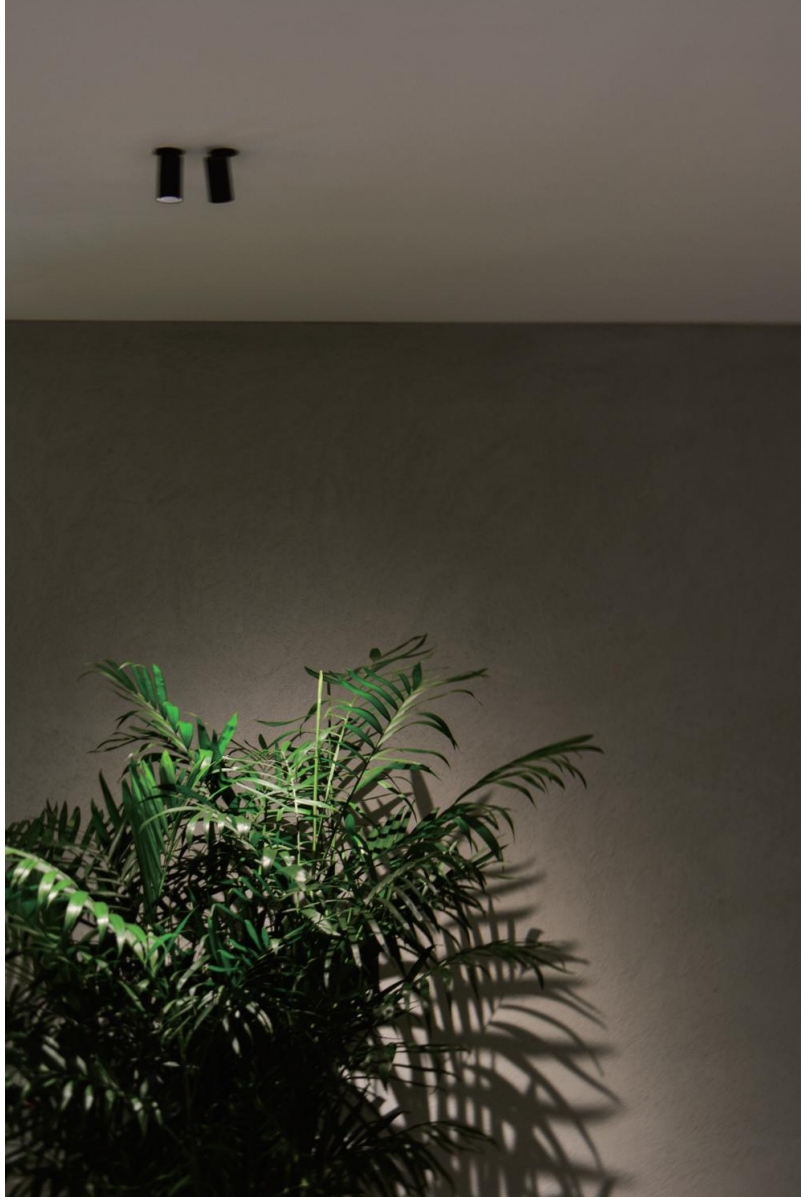

<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
8W	388-385	20°- 50°	RT4108W-30N2050-B



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
8W	388-385	20°- 50°	TL4108W-30N2050-B