


FLEXLINK



Flexlink is an exceptionally modular linear outdoor spotlight system. Each unit can be used individually or seamlessly linked together to create straight, curved, or circular arrangements—making it perfect for illuminating outdoor areas, trees, and facades with maximum flexibility.

This product is available exclusively for commercial projects or large residential developments.






Outdoor Spotlight



Adjustable Optic

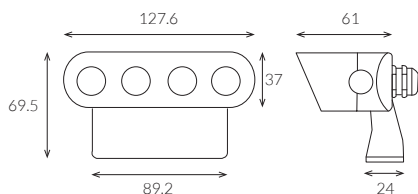

Sand black



Sand grey




Sand white



Bespoke

IP Rating:	IP66
Impact resistance:	IK06
Optics:	15°/25°/30°/45°/60°/10X30°/20X40°/15X30°
UGR:	<19
CRI:	>80Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/4000K/5700K/6000K/RED/GREEN/BLUE/RGB/RGBW
Delivered lumen output:	80 lm/W
Control:	On/off, 0/1-10V, Dali, PWM,DTW,DMX/RDM
Binning	2 Step MacAdams
Voltage:	DC 24V
Power(W):	6W@Single color 8W@RGB/RGBW
Ambient temp:	-20 °C to 45 °C
Class:	III
Material:	Aluminium Alloy + Steel

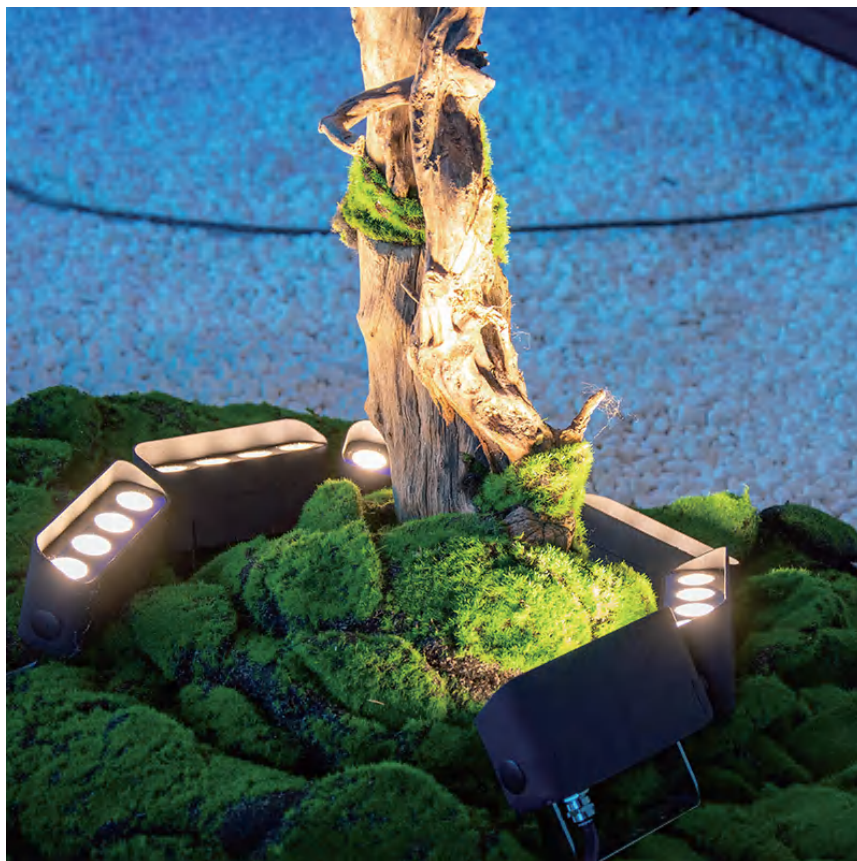

W system	lm system	optics	CCT	code
6W	80lm/W	30°	3000K	FL0406W-30N30
8W	35lm/W	30°	RGB	FL0408W-RGBN30
8W	35lm/W	30°	RGBW	FL0408W-RGBWN30