

ORBIT


Φ45 Recessed Contour Spotlight



Adjustable Optic




Recessed Trim



Black Painted



Recessed Trimless



IP Rating:

IP20

Optics:

Framing

UGR:

<10

CRI:

98Ra

Lifetime:

>50,000 hrs (L70 B10)

CCT:

2700K/3000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning:

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:


DC 36V 250mA 10W

Ambient temp:

-20 °C to 45 °C


Class:

II




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25

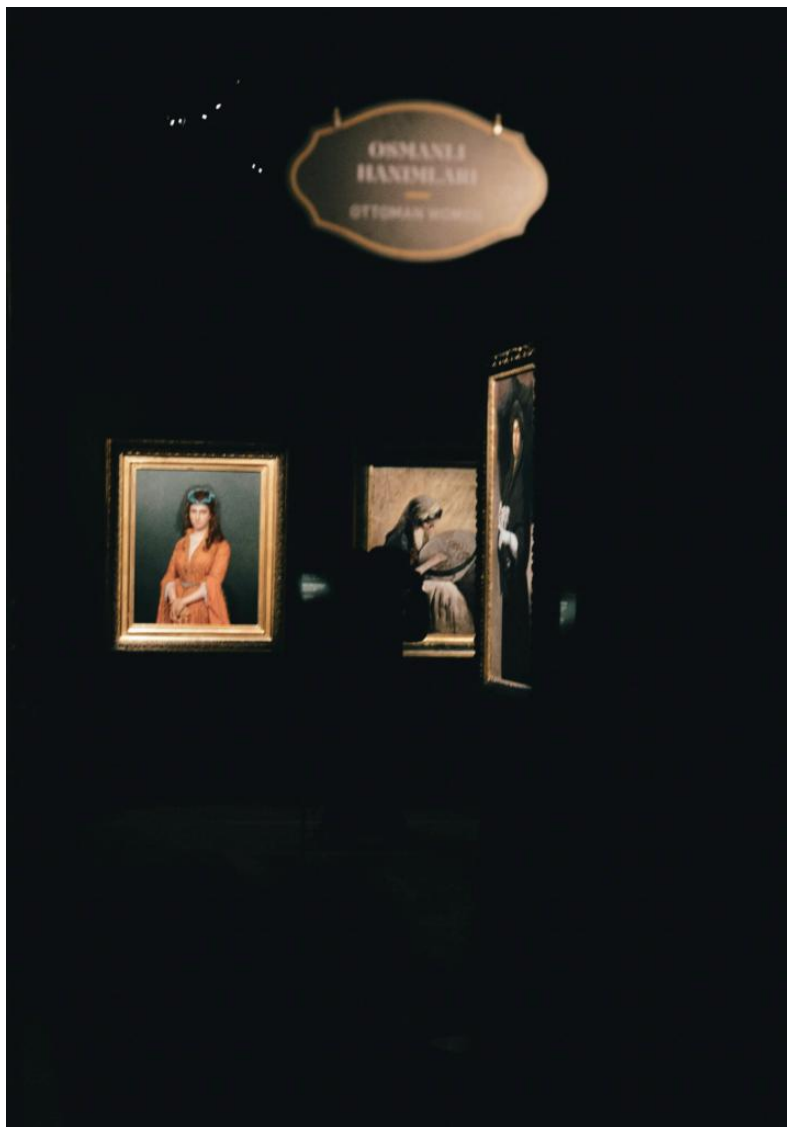

W system	lm system	code
10W	239	MARC4510W



W system	lm system	code
10W	239	MATC4510W