


MOOD DOWNLIGHT

Φ75
Fixed Round



baffle

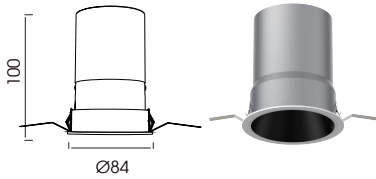


IP Rating: IP20 and IP44 options
Optics: 24°/36°/50°
UGR: <10
CRI: 98Ra
Lifetime: >50,000 hrs (L70 B10)
CCT: 2700K/3000K/3500K/4000K/5000K/
 2000K-3000K/1800K-4000K/2700K-6000K

Typical Source Efficacy (lm/W): 110
Control: On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning: 2 Step MacAdams
Input: AC220-240V 50/60Hz
Output: DC 36V 150mA 6W
 DC 36V 200mA 8W
 DC 36V 250mA 10W
 DC 36V 300mA 12W


Ambient temp: -20 °C to 45 °C
Class: II

Optional accessories: Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter




15W Ra98 3000K 24°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 9636 | 0.20 |
| 1.0 | 2409 | 0.41 |
| 1.5 | 1071 | 0.61 |
| 2.0 | 602 | 0.81 |
| 2.5 | 385 | 1.02 |
| 3.0 | 268 | 1.22 |



15W Ra98 3000K 36°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 5780 | 0.30 |
| 1.0 | 1445 | 0.60 |
| 1.5 | 642 | 0.89 |
| 2.0 | 361 | 1.19 |
| 2.5 | 231 | 1.49 |
| 3.0 | 161 | 1.79 |




15W Ra98 3000K 50°


| h(m) | E(lx) | D(m) |
|------|-------|------|
| 0.5 | 2268 | 0.46 |
| 1.0 | 567 | 0.92 |
| 1.5 | 252 | 1.37 |
| 2.0 | 142 | 1.83 |
| 2.5 | 91 | 2.29 |
| 3.0 | 63 | 2.75 |




DuraGreen project:
Gucci Showroom




| W system | lm system | optics | code |
|----------|-----------|--------|-----------------|
| 6W | 522 | 24° | MF7506W-30N24-B |
| 6W | 542 | 36° | MF7506W-30N36-B |
| 6W | 538 | 50° | MF7506W-30N50-B |



| W system | lm system | optics | code |
|----------|-----------|--------|-----------------|
| 8W | 648 | 24° | MF7508W-30N24-B |
| 8W | 671 | 36° | MF7508W-30N36-B |
| 8W | 655 | 50° | MF7508W-30N50-B |



| W system | lm system | optics | code |
|----------|-----------|--------|-----------------|
| 10W | 817 | 24° | MF7510W-30N24-W |
| 10W | 845 | 36° | MF7510W-30N36-W |
| 10W | 829 | 50° | MF7510W-30N50-W |



| W system | lm system | optics | code |
|----------|-----------|--------|-----------------|
| 12W | 939 | 24° | MF7512W-30N24-W |
| 12W | 968 | 36° | MF7512W-30N36-W |
| 12W | 954 | 50° | MF7512W-30N50-W |