

MOOD DOWNLIGHT



Φ55 Fixed Round



cutout :55mm



Fixed Optic

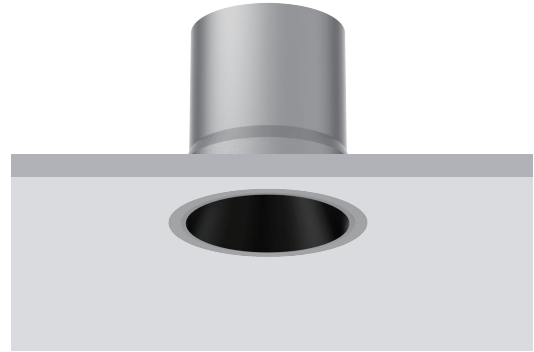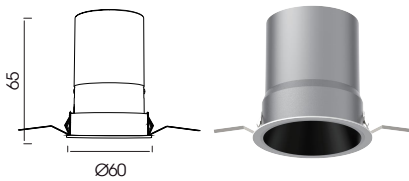

baffle



Black Matt



White Matt



Silver Matt



Grey Specular



Black Specular



Silver Specular



Gold Specular



Bespoke


IP Rating:	IP20 and IP44 options
Optics:	24°/36°/50°
UGR:	< 10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K

Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W

Ambient temp: -20 °C to 45 °C


Class: II

Optional accessories: Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	4847	0.21
1.0	1212	0.43
1.5	539	0.64
2.0	303	0.86
2.5	194	1.07
3.0	135	1.29




10W Ra98 3000K 36°


h(m)	E(lx)	D(m)
0.5	2553	0.32
1.0	638	0.65
1.5	284	0.97
2.0	160	1.29
2.5	102	1.61
3.0	71	1.94




DuraGreen project:
Edra Showroom



W system	lm system	optics	code
6W	405	24°	MFL5506W-30N24-W
6W	422	36°	MFL5506W-30N36-W
6W	407	50°	MFL5506W-30N50-W



W system	lm system	optics	code
8W	480	24°	MFL5508W-30N24-W
8W	498	36°	MFL5508W-30N36-W
8W	473	50°	MFL5508W-30N50-W



W system	lm system	optics	code
10W	550	24°	MFL5510W-30N24-W
10W	574	36°	MFL5510W-30N36-W
10W	566	50°	MFL5510W-30N50-W