


MOOD DOWNLIGHT

Φ75
Fixed Round



Fixed Optic

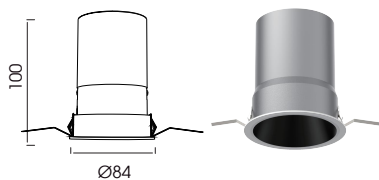

baffle



- IP Rating:

Optics:

UGR:

CRI:

Lifetime:

CCT:
- IP20 and IP44 options

24°/36°/50°

<10

98Ra

>50,000 hrs (L70 B10)

2700K/3000K/3500K/4000K/5000K/
2000K-3000K/1800K-4000K/2700K-6000K
- Typical Source

Efficacy (lm/W):

Control:

Binning:

Input:

Output:
- 110

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

2 Step MacAdams

AC220-240V 50/60Hz


DC 36V 150mA 6W
DC 36V 200mA 8W
DC 36V 250mA 10W
DC 36V 300mA 12W
- Ambient temp:

Class:

Optional accessories:
- 20 °C to 45 °C


II

Honeycomb louvre, Solite Lense, Spread Lense,
Colour Filter




12W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	8941	0.21
1.0	2235	0.43
1.5	993	0.64
2.0	559	0.85
2.5	358	1.06
3.0	248	1.28



12W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	4622	0.32
1.0	1156	0.64
1.5	514	0.96
2.0	289	1.28
2.5	185	1.61
3.0	128	1.93




12W Ra98 3000K 50°


h(m)	E(lx)	D(m)
0.5	1641	0.46
1.0	410	0.92
1.5	182	1.39
2.0	103	1.85
2.5	66	2.31
3.0	46	2.77




DuraGreen project:
Gucci Showroom




W system	lm system	optics	code
6W	593	24°	MF7506W-30N24-B
6W	590	36°	MF7506W-30N36-B
6W	617	50°	MF7506W-30N50-B



W system	lm system	optics	code
8W	787	24°	MF7508W-30N24-B
8W	785	36°	MF7508W-30N36-B
8W	820	50°	MF7508W-30N50-B



W system	lm system	optics	code
10W	971	24°	MF7510W-30N24-W
10W	952	36°	MF7510W-30N36-W
10W	994	50°	MF7510W-30N50-W



W system	lm system	optics	code
12W	1097	24°	MF7512W-30N24-W
12W	1103	36°	MF7512W-30N36-W
12W	1108	50°	MF7512W-30N50-W



MOOD light fittings, stylishly designed with trendy colors and high-quality materials, radiate sophistication and elegance. They offer endless possibilities and exceptional versatility, easily adapting to any space.





Black Matt



White Matt



Silver Matt



Black Specular




Silver Specular



Gold Specular



Grey Specular

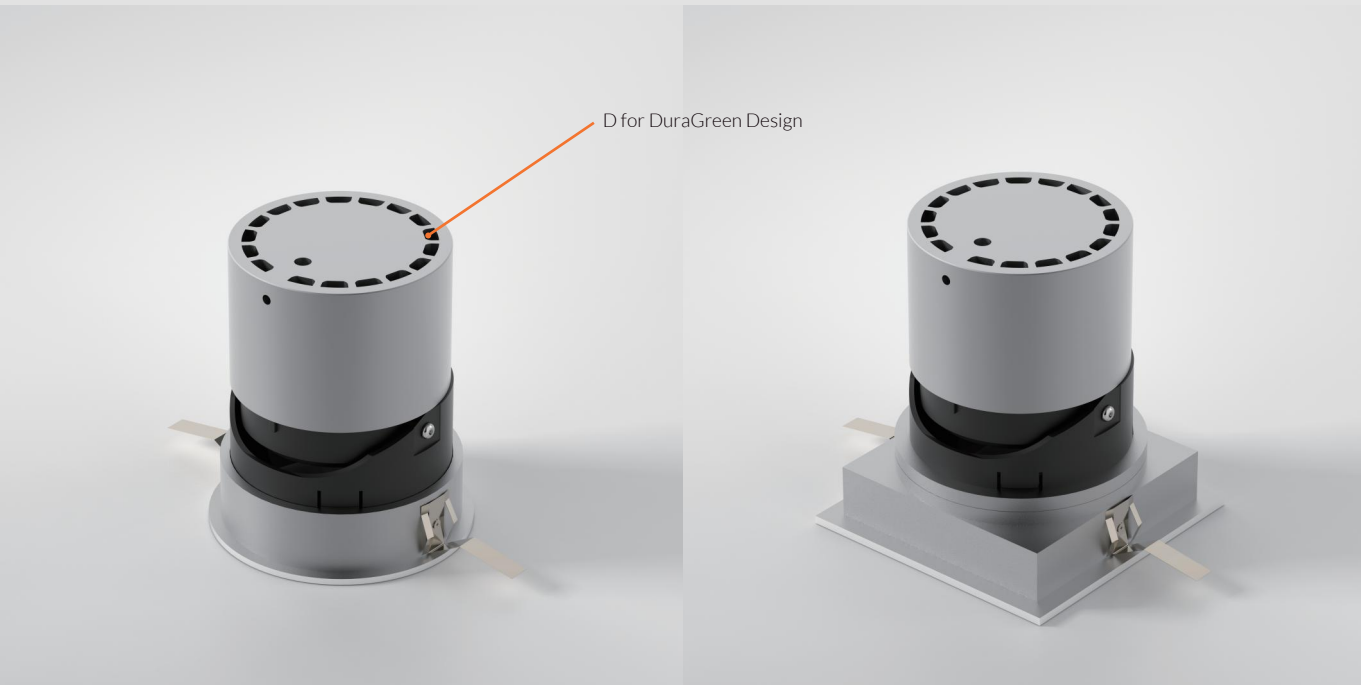

Specification Code

Type	Cut out	Power	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
MF	75	08W	30	N	24	W	B	C
MF/Fixed	22/22mm		27/2700K	M/Mains Dim	05/5°	W/White	B/Black Specular	C/Clear Lens
AF/Adjustable	33/33mm		30/3000K	D/DALI	10/10°	B/Black	S/Silver Specular	F/Frosted Lens
MFL/Lens type,	35/35mm		40/4000K	0/0-10V	13/13°	L/Polished Chrome	W/White Matt	H/Honeycomb
Fixed	40/40mm		WD/Warm Dim	N/Non Dim	15/15°	G/Polished Brass	BM/Black Matt	S/Spread Lense
AFL/Lens type,	45/45mm		1840/1800K-4000K	X/No Driver	20/20°	J/Antique Bronze		
Adjustable	55/55mm		2765/2700K-6500K		24/24°	S/Satin Nickle		
MFV/Wall Wash	58/58mm				30/30°			
MFZ/Zoomable	75/75mm				36/36°			
MFV/Pinhole	80/80mm				50/50°			
MFQ/Fixed Square	100/100mm							