

SYSTEM 57


Φ57 ACME Downlight Trimless Fixed Round Wall Wash



cutout :57mm



Wall Wash Optic



60



baffle



Black Painted
9005



White Painted
9016



Bespoke

IP Rating:	IP44 Front
Optics:	Asymmetrical Wallwash
UGR:	<10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 1800K-4000K/2700K-6000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 36V 150mA 6W

DC 36V 200mA 8W

DC 36V 250mA 10W

Ambient temp:

-20 °C to 45 °C

Class:

II

Material:


Fine aluminium 6063A

Fire resistance test:

60 minutes

Certification:



CB/CE/UKCA/GLOBAL MARK/60-MINUNTE FIRE RESISTANCE



10W Ra98 3000K

Asymmetrical

h(m)	E(lx)	D(m)
0.5	1338	0.37
1.0	335	0.74
1.5	149	1.12
2.0	84	1.49
2.5	54	1.86
3.0	34	2.23

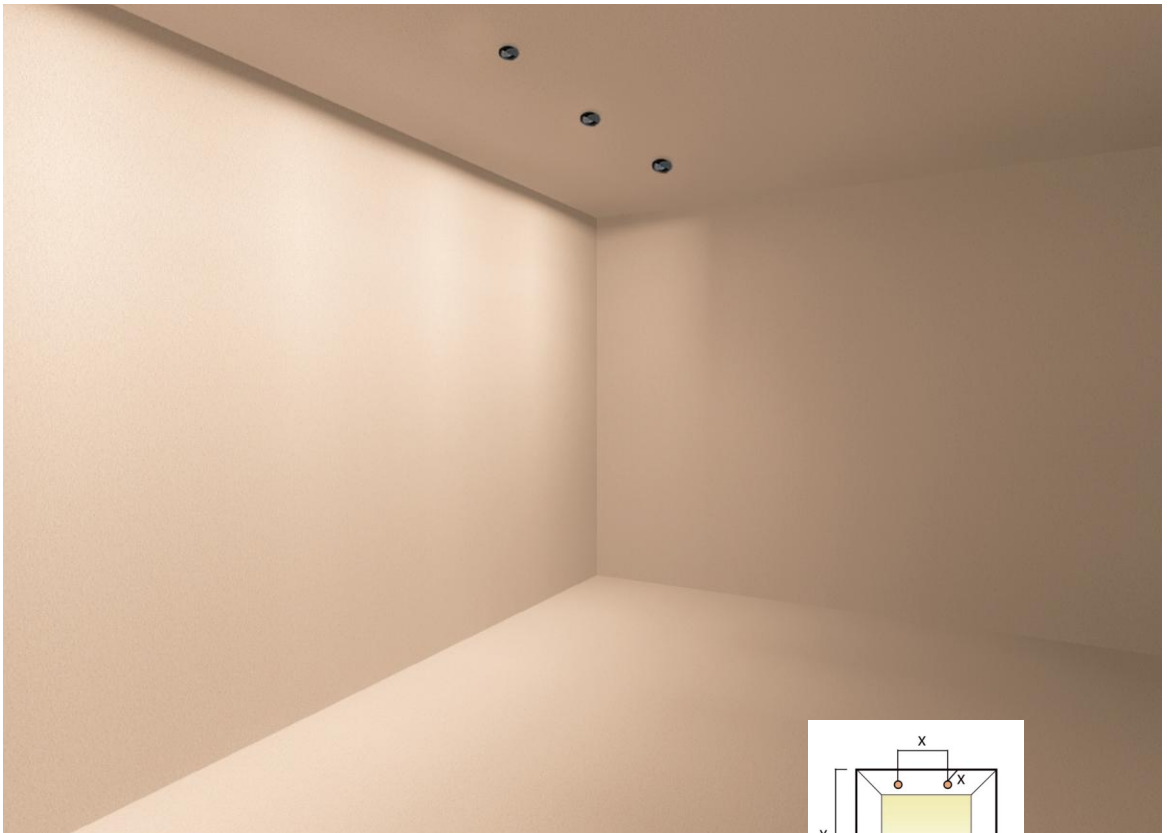

X = distance to wall
= ceiling height ÷ 3



W system	lm system	optics	code
6W	326	Wall Wash	AFL5706W-TL-30NWS



W system	lm system	optics	code
8W	383	Wall Wash	AFL5708W-TL-30NWS



W system	lm system	optics	code
10W	442	Wall Wash	AFL5710W-TL-30NWS