


CELESTIA

Φ100 Alabaster Pendant

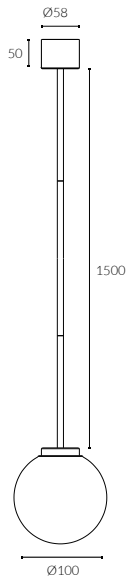


Signature Metal Finishes

-  Polished Chrome
-  Polished Brass
-  Black Nickel

IP Rating:	IP44
Optics:	125°
UGR:	<17
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K
Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 200mA 8W
Ambient temp:	-20 °C to 45 °C
Class:	II
Material:	Fine aluminium 6063A



Each pendant rod section measures 0.5 meters in length and can be seamlessly connected with additional sections. This allows for effortless adjustment of the installation height from 0.5 meters to 2 meters, accommodating the specific requirements of any project.



W system	lm system	optics	code
8W	155	125°	PVSS5008W-30N125