



# NEONFLEX

## NEON STRIP 0612 BEND SIDE


flexible on the vertical axis



BEND SIDE



AP0612U

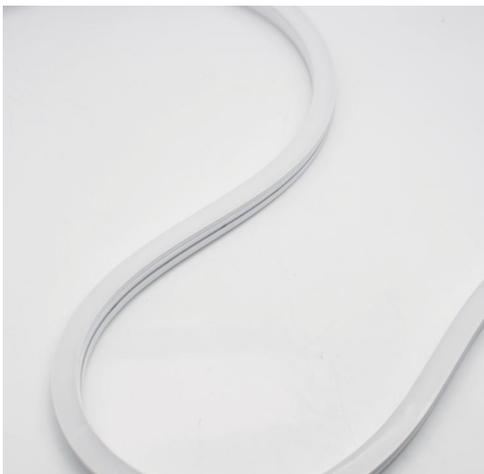


### Accessories not included



Clips (AC0612U)



Rigid Profile (AP0612U)



Flexible Profile (AF0612U)

<b>IP Rating:</b>	IP67
<b>Optics:</b>	115°
<b>CRI:</b>	92Ra
<b>Lifetime:</b>	>50,000 hrs (L70 B10)
<b>CCT:</b>	2700K/3000K/4000K/6500K/2700K-6500K
<b>Typical Source</b>	
<b>Efficacy (lm/W):</b>	113
<b>Control:</b>	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
<b>Binning:</b>	2 Step MacAdams
<b>Voltage:</b>	DC 24V
<b>Power(W):</b>	7W/m, 10W/m
<b>Ambient temp:</b>	-20 °C to 45 °C
<b>Class:</b>	III



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
7W	50Lm /W	115°	E67-BS0612-07W-27
7W	50Lm /W	115°	E67-BS0612-07W-30
7W	52Lm /W	115°	E67-BS0612-07W-40
7W	52Lm /W	115°	E67-BS0612-07W-65



<b>W system</b>	<b>lm system</b>	<b>optics</b>	<b>code</b>
10W	50Lm /W	115°	E67-BS0612-10W-27
10W	50Lm /W	115°	E67-BS0612-10W-30
10W	52Lm /W	115°	E67-BS0612-10W-40
10W	52Lm /W	115°	E67-BS0612-10W-65