




ACME SPY

Φ78


Trimless Long Snoot Downlight

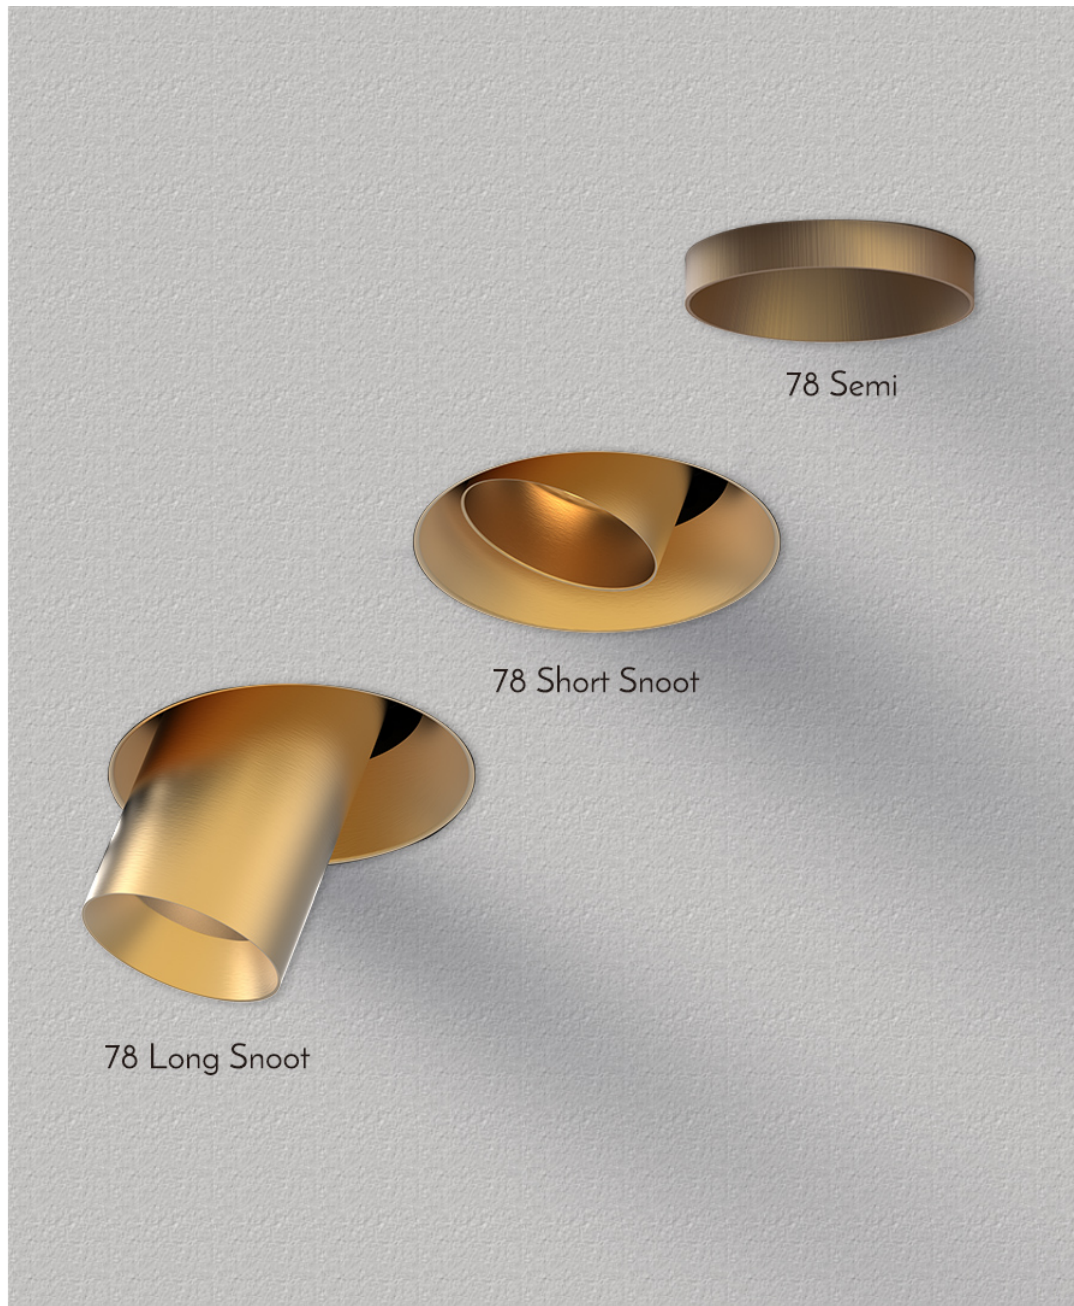



cutout: 78mm



Adjustable Optic



68

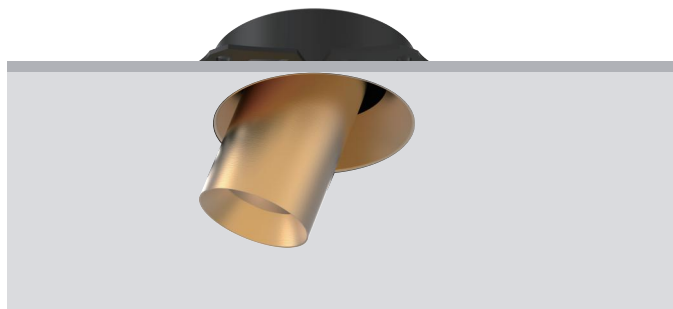

Standard

Black Painted
9005

White Painted
9016

Curated Finishes (MOQ 20 applies)


Polished Brass Black Nickel Bright Chrome Rose Gold Pearl Nickel

Antique Copper Aged Bronze Antique Brass Dark Brass Brushed Grey

IP Rating:	IP20 and IP44 options
Optics:	10°/15°/24°/36°/42°
UGR:	<10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K


Typical Source

Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 250mA 10W
Ambient temp:	-20 C to 45 C
Class:	II
Material:	Fine aluminium 6063A




10W Ra98 3000K 10°

h(m)	E(lx)	D(m)
0.5	14091	0.08
1.0	3523	0.17
1.5	1566	0.25
2.0	881	0.34
2.5	564	0.42
3.0	391	0.50




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	8307	0.14
1.0	2077	0.28
1.5	923	0.42
2.0	519	0.56
2.5	332	0.70
3.0	231	0.84




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	4933	0.19
1.0	1233	0.39
1.5	548	0.58
2.0	308	0.78
2.5	197	0.97
3.0	137	1.17




10W Ra98 3000K 36°

h(m)	E(lx)	D(m)
0.5	2734	0.31
1.0	684	0.63
1.5	304	0.94
2.0	171	1.25
2.5	109	1.57
3.0	76	1.88



10W Ra98 3000K 42°

h(m)	E(lx)	D(m)
0.5	1561	0.38
1.0	390	0.77
1.5	173	1.15
2.0	98	1.54
2.5	62	1.92
3.0	43	2.30



W system	lm system	optics	code
10W	490	10°	AFL7810W-LS-TL-30N10-B
10W	553	15°	AFL7810W-LS-TL-30N15-B
10W	540	24°	AFL7810W-LS-TL-30N24-B
10W	664	36°	AFL7810W-LS-TL-30N36-B
10W	556	42°	AFL7810W-LS-TL-30N42-B