


MOOD DOWNLIGHT

Φ55 Fixed Round Wall Wash


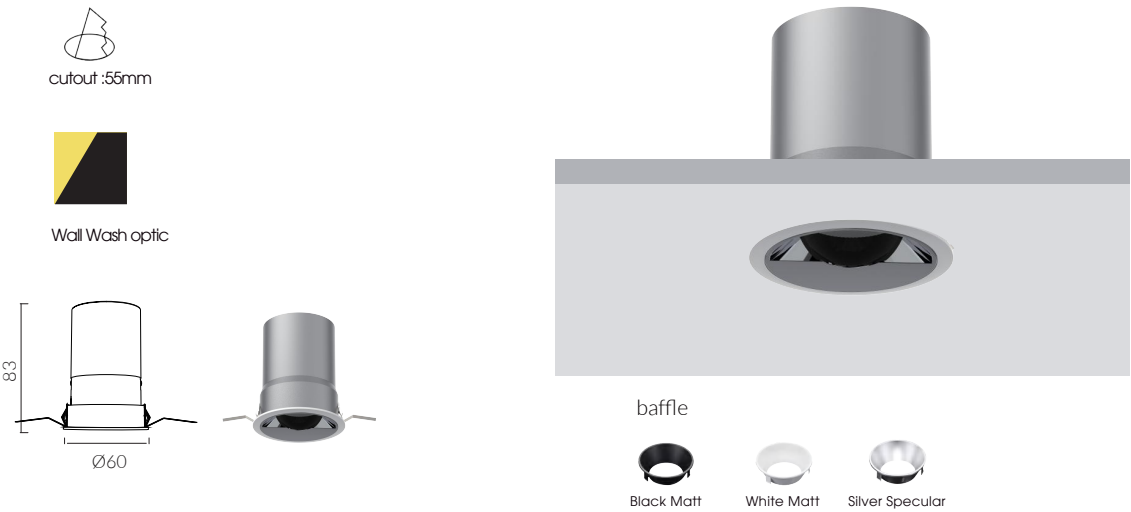


Recessed round wall-washer luminaire designed for creating a vertical downward beam of light

IP Rating:	IP20 and IP44 options
Optics:	Wall Wash
UGR:	< 17
CRI:	98Ra
Lifetime:	> 50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K/5000K/ 2000K-3000K/1800K-4000K/2700K-6000K

Typical Source	110
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning:	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W

Ambient temp:	-20 °C to 45 °C
Class:	II

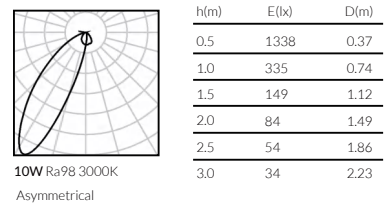



DuraGreen project:
Poliform Showroom



W system	lm system	optics	code
6W	326	Wall Wash	MFW5506W-30NWS-W



W system	lm system	optics	code
8W	383	Wall Wash	MFW5508W-30NWS-W



W system	lm system	optics	code
10W	442	Wall Wash	MFW5510W-30NWS-W