



ACME PINHOLE

Φ50 Engine

Trimless Fixed Round Downlight



cutout:50mm

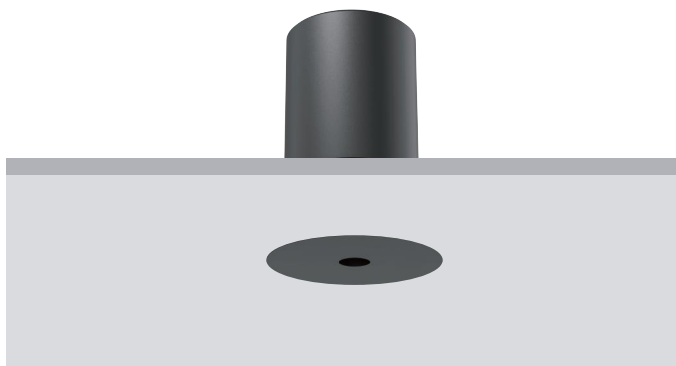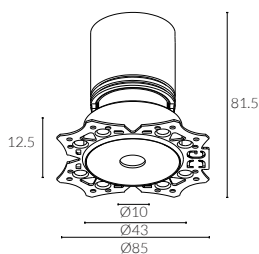

baffle



Black Painted
9005




White Painted
9016

IP Rating:	Front IP44, optional IP65
Optics:	28°/33°
UGR:	< 10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K 1800-3000K(Warm Dim), 2700K - 6000K (Tunable White)


Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W

Ambient temp:	-20 °C to 45 °C
Class:	II
Material:	Fine aluminium 6063A
Certification :	CB/CE/UKCA/GLOBAL MARK/60-MINUNTE FIRE RESISTANCE



8W Ra98 3000K 28°

h(m)	E(lx)	D(m)
0.5	2921	0.25
1.0	730	0.50
1.5	325	0.75
2.0	183	1.00
2.5	117	1.25
3.0	81	1.50



8W Ra98 3000K 33°

h(m)	E(lx)	D(m)
0.5	2392	0.29
1.0	598	0.58
1.5	266	0.88
2.0	149	1.17
2.5	96	1.46
3.0	66	1.75



W system	lm system	optics	code
6W	258	28°	AFL5006W-P-TL-30N28-B
6W	295	33°	AFL5006W-P-TL-30N33-B



W system	lm system	optics	code
8W	318	28°	AFL5008W-P-TL-30N28-B
8W	356	33°	AFL5008W-P-TL-30N33-B