

ACME OVAL

Φ57 Engine



Mini-Trim Adjustable Downlight



cutout:57mm



Adjustable Optic

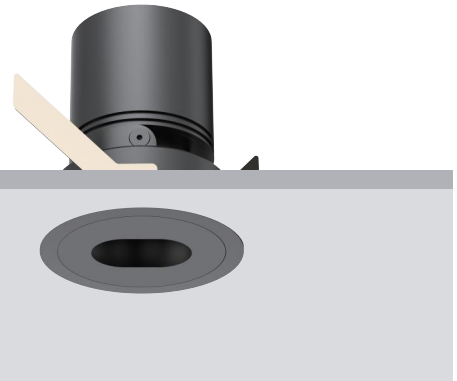

bezel | baffle



Black Painted
9005




White Painted
9016

IP Rating:	Front IP44, optional IP65
Optics:	15°/24°/36°
UGR:	<10
CRI:	98Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K/3000K/3500K/4000K 1800-3000K(Warm Dim), 2700K - 6000K (Tunable White)

Typical Source	
Efficacy (lm/W):	110
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 150mA 6W DC 36V 200mA 8W DC 36V 250mA 10W


Ambient temp:	-20 °C to 45 °C
Class:	II
Optional accessories:	Honeycomb louvre, Solite Lense, Spread Lense, Colour Filter

Ceiling Thickness:	9mm-28mm
Material:	Fine aluminium 6063A
Certification:	CB/CE/UKCA/GLOBAL MARK/60-MINUNTE FIRE RESISTANCE




10W Ra98 3000K 15°

h(m)	E(lx)	D(m)
0.5	12989	0.11
1.0	3247	0.22
1.5	1443	0.34
2.0	812	0.45
2.5	520	0.56
3.0	361	0.67




10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	7428	0.20
1.0	1857	0.40
1.5	825	0.60
2.0	464	0.80
2.5	297	1.00
3.0	206	1.20




10W Ra98 3000K 36°


h(m)	E(lx)	D(m)
0.5	3506	0.29
1.0	877	0.58
1.5	309	0.87
2.0	219	1.15
2.5	140	1.44
3.0	97	1.73



W system	lm system	optics	code
6W	256	15°	AFL5706W-O-30N15
6W	360	24°	AFL5706W-O-30N24
6W	371	36°	AFL5706W-O-30N36



W system	lm system	optics	code
8W	330	15°	AFL5708W-O-30N15
8W	465	24°	AFL5708W-O-30N24
8W	475	36°	AFL5708W-O-30N36



W system	lm system	optics	code
10W	397	15°	AFL5710W-O-30N15
10W	628	24°	AFL5710W-O-30N24
10W	574	36°	AFL5710W-O-30N36