

FOCUS

Φ32


Outdoor Uplights with Glare Shield



cutout :32mm



Fixed Optic

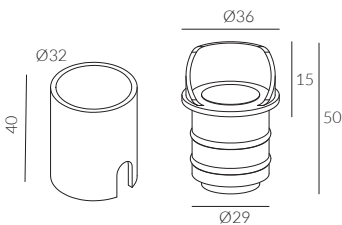


Bezel



Solid Brass


Accessories not included

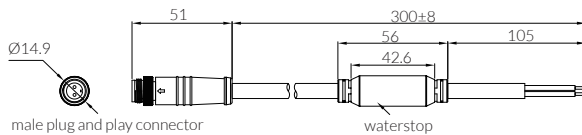

male plug and play connector


waterstop

IP Rating:	IP67
Optics:	10°/20°/30°
UGR:	<19
CRI:	92Ra
Lifetime:	>50,000 hrs (L70 B10)
CCT:	2700K / 3000K
Typical Source	
Efficacy (lm/W):	113
Control:	On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Voltage:	DC 24V
Power(W):	2.5W
Ambient temp:	-20 °C to 45 °C
Class:	III
Material:	Brass + Stainless Steel




2.5W Ra92 3000K 10°

h(m)	E(lx)	D(m)
0.5	4115	0.09
1.0	1029	0.28
1.5	457	0.27
2.0	257	0.36
2.5	165	0.46
3.0	114	0.55



2.5W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	1155	0.20
1.0	289	0.41
1.5	128	0.61
2.0	72	0.81
2.5	46	1.02
3.0	32	1.22




2.5W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	776	0.29
1.0	194	0.58
1.5	86	0.88
2.0	48	1.17
2.5	31	1.46
3.0	22	1.75



Illuminate your garden with our solid brass spotlight, designed to age gracefully as it develops a rich patina that reflects the passage of time.



W system	lm system	optics	code
2.5W	123	10°	UL322.5W-GS-10
2.5W	94	20°	UL322.5W-GS-20
2.5W	124	30°	UL322.5W-GS-30