

FOCUS

Φ32


Outdoor Uplights



cutout :32mm




Fixed Optic

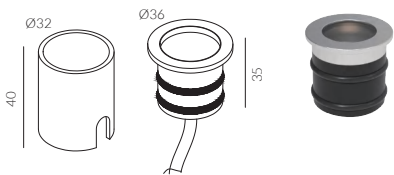


glare shield 50%

Accessories not included

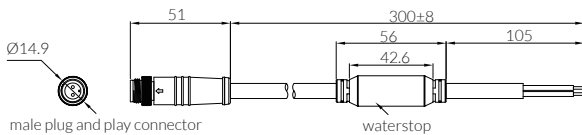


- IP Rating:** IP67
- Optics:** 10°/20°/30°
- UGR:** <19
- CRI:** 92Ra
- Lifetime:** >50,000 hrs (L70 B10)
- CCT:** 2700K / 3000K
- Typical Source**
- Efficacy (lm/W):** 113
- Control:** On/off, Mains Dim, 0/1-10V, Dali, Zigbee, Casambi
- Binning**
- Voltage:** DC 24V
- Power(W):** 2.5W
- Ambient temp:** -20 °C to 45 °C
- Class:** III
- Material:** Brass + Stainless Steel




2.5W Ra92 3000K 10°

h(m)	E(lx)	D(m)
0.5	4115	0.09
1.0	1029	0.28
1.5	457	0.27
2.0	257	0.36
2.5	165	0.46
3.0	114	0.55



2.5W Ra92 3000K 20°

h(m)	E(lx)	D(m)
0.5	1155	0.20
1.0	289	0.41
1.5	128	0.61
2.0	72	0.81
2.5	46	1.02
3.0	32	1.22



2.5W Ra92 3000K 30°

h(m)	E(lx)	D(m)
0.5	776	0.29
1.0	194	0.58
1.5	86	0.88
2.0	48	1.17
2.5	31	1.46
3.0	22	1.75



DuraGreen project:
Luxury Home London



W system	lm system	optics	code
2.5W	123	10°	UL322.5W-10
2.5W	94	20°	UL322.5W-20
2.5W	124	30°	UL322.5W-30