


ORBIT CONTOUR

Φ23

Recessed Contour Spotlight




Adjustable Optic



Black Painted

Installation Accessories

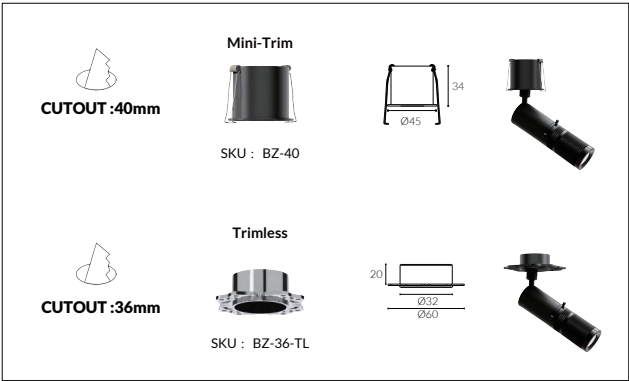

IP Rating:

IP20

Optics:

Framing

UGR:

<10

CRI:

92Ra

Lifetime:

50,000 hrs (L90 B10)

CCT:

2700K/3000K

Typical Source

Efficacy (lm/W):

110

Control:

On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi

Binning

2 Step MacAdams

Input:

AC220-240V 50/60Hz

Output:

DC 3V 650mA 3W

Ambient temp:


-20 °C to 25 °C

Class:

III


Material:

Fine aluminium 6063A



3W Ra98 3000K 21°

h(m)	E(lx)	D(m)
0.5	1287	0.19
1.0	322	0.39
1.5	143	0.58
2.0	80	0.77
2.5	51	0.96
3.0	36	1.16



3W Ra98 3000K 46°

h(m)	E(lx)	D(m)
0.5	72	0.43
1.0	18	0.86
1.5	8	1.29
2.0	4	1.71
2.5	3	2.41
3.0	2	2.57



Code example:

RTC 23 03W -30 N F-W B

RTC/ mini-trim contour

TLC/ trimless contour

23 / 23 engine

03W / system power

30 / 3000K

N / non dim

F / Framing

W/ white bezel TB / trimless bezel

B/ black structure



Mini-Trim

W system	lm system	code
3W	58	RTC2303W-30NF



Trimless

W system	lm system	code
3W	58	TLC2303W-30NF