


ORBIT CONTOUR

Φ45


Recessed Contour Spotlight



Adjustable Optic




Installation Accessories

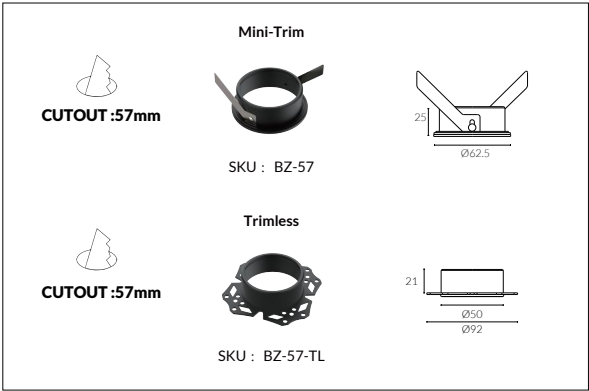

Black Painted

IP Rating:	IP20
Optics:	Framing
UGR:	<10
CRI/RF/RG/R9:	typ. 98/95/104/97
Lifetime:	50,000 hrs (L90 B10)
CCT:	2700K/3000K/3500K/2700-6000K
Typical Source Efficacy (lm/W):	113
Control:	On/off, Phase Cut, 0/1-10V, Dali, Zigbee, Casambi
Binning	2 Step MacAdams
Input:	AC220-240V 50/60Hz
Output:	DC 36V 250mA 10W
Ambient temp:	-20 °C to 25 °C
Class:	III
Material:	Fine aluminium 6063A



10W Ra98 3000K 24°

h(m)	E(lx)	D(m)
0.5	3216	0.21
1.0	804	0.42
1.5	357	0.63
2.0	201	0.84
2.5	129	1.04
3.0	89	1.25



Code example:

RTC 45 10W -30 N F-W B

RTC/ mini-trim contour

TLC/ trimless contour

45 / 45 engine

10W / system power


30 / 3000K

N / non dim

F / Framing

W/ white bezel TB/ trimless bezel

B/ black structure

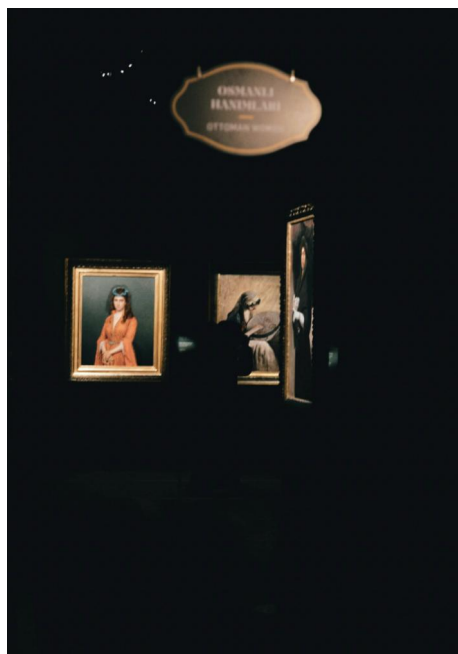

W system	lm system	code
10W	239	RTC4510W-30NF

W system	lm system	code
10W	239	TLC4510W-30NF